

BIOFLEX-500® -JZ-HF-C


Bio-fuel resistant, abrasion resistant,
recyclable environment friendly, bio-oil resistant¹⁾, cable for drag chains, Cu-screened,
EMC-preferred type



Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
25867	25 G 1,5	23,1	533,0	927,0	16
25868	2 x 2,5	11,8	96,0	185,0	14
25869	3 G 2,5	13,0	150,0	278,0	14
25870	4 G 2,5	14,0	174,0	370,0	14
25871	5 G 2,5	15,1	200,0	412,0	14
25872	7 G 2,5	16,2	240,0	470,0	14
25873	12 G 2,5	21,0	410,0	738,0	14
25874	14 G 2,5	23,4	480,0	870,0	14
25875	18 G 2,5	25,7	620,0	1100,0	14
25876	25 G 2,5	31,0	821,0	1512,0	14

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
25877	2 x 4	13,4	135,0	235,0	12
25878	3 G 4	15,8	178,0	350,0	12
25879	4 G 4	17,3	222,0	460,0	12
25880	5 G 4	19,0	328,0	550,0	12
25881	3 G 6	19,5	250,0	525,0	10
25882	4 G 6	21,0	305,0	700,0	10
25883	5 G 6	23,0	441,0	800,0	10
25884	3 G 10	18,8	370,0	855,0	8
25885	4 G 10	25,0	485,0	1140,0	8
25886	5 G 10	26,4	610,0	1310,0	8
25887	4 G 16	28,0	840,0	1391,0	6

Dimensions and specifications may be changed without prior notice.

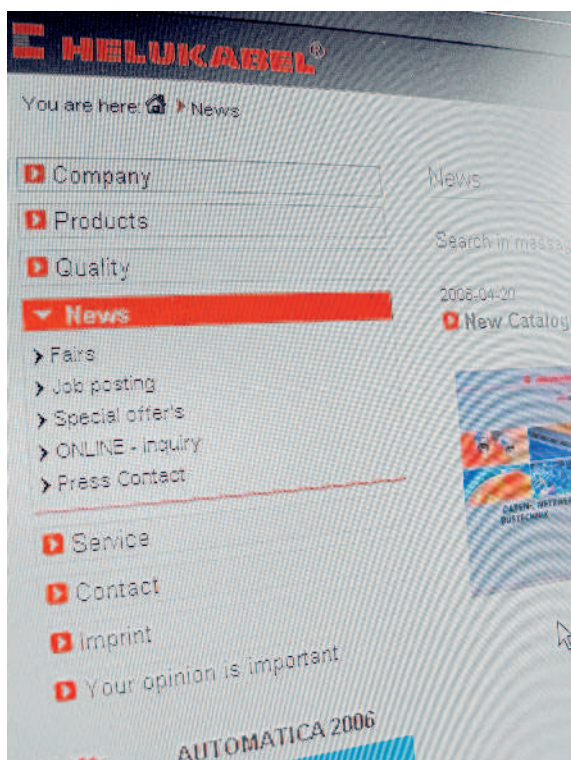

Our Service on the Internet:

News

Here you will find current information on the subjects of

- Fairs
- Job posting
- Online-inquiry
- Press contact
- Special offers

Click on the topic to get more information.

www.helukabel.de