


MULTISPEED® 500-TPE UL/CSA high flexible, safety against high bending in drag chain systems, low torsion, halogen-free



Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
24468	2 x 1	18	5,2	19,2	50,0
24469	3 G 1	18	6,0	29,0	60,0
24470	4 G 1	18	6,4	38,0	74,0
24471	5 G 1	18	7,0	48,0	86,0
24472	7 G 1	18	10,7	67,0	114,0
24473	12 G 1	18	12,1	115,0	210,0
24474	18 G 1	18	14,9	173,0	291,0
24475	25 G 1	18	16,9	240,0	380,0
24476	3 G 1,5	16	6,7	43,0	84,0
24477	4 G 1,5	16	7,3	58,0	108,0
24478	5 G 1,5	16	8,0	72,0	126,0
24479	7 G 1,5	16	12,5	101,0	169,0
24480	12 G 1,5	16	14,3	173,0	299,0
24481	18 G 1,5	16	17,5	259,0	460,0
24482	25 G 1,5	16	19,8	360,0	640,0

Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
24483	4 G 2,5	14	8,9	96,0	179,0
24484	5 G 2,5	14	9,9	120,0	230,0
24485	7 G 2,5	14	15,2	168,0	294,0
24486	12 G 2,5	14	17,6	288,0	510,0
24487	18 G 2,5	14	21,5	432,0	722,0
24488	25 G 2,5	14	24,1	600,0	950,0

Dimensions and specifications may be changed without prior notice.

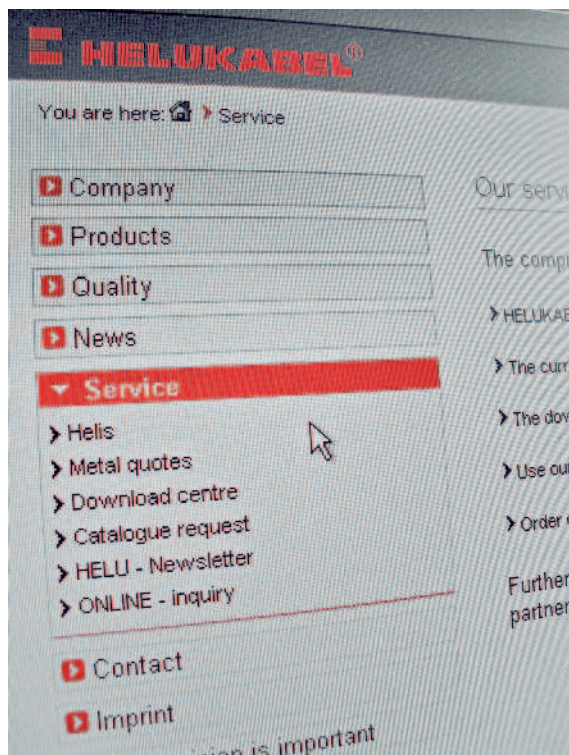

Our Service on the Internet:

Service

Through our service area, you will reach HELIS, the HELUKABEL Information System. Here you can find out the most important metal prices, receive important documents in the Download Centre, request documents and the newsletter.

www.helukabel.de