


# JZ-600 UL/CSA flexible, number coded, 0,6/1kV



Part No. Colour black	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
11844	12 G 1,5	16	16,6	173,0	370,0
11845	18 G 1,5	16	19,7	259,0	520,0
11846	25 G 1,5	16	23,9	360,0	730,0
11847	2 x 2,5	14	9,4	48,0	160,0
11848	3 G 2,5	14	9,9	72,0	175,0
11849	4 G 2,5	14	11,1	96,0	203,0
11850	5 G 2,5	14	12,4	120,0	251,0
11851	7 G 2,5	14	15,0	168,0	330,0
11852	12 G 2,5	14	18,4	288,0	553,0
11853	18 G 2,5	14	22,0	432,0	795,0
11854	25 G 2,5	14	26,9	600,0	1110,0
11855	2 x 4	12	11,4	77,0	180,0
11856	3 G 4	12	12,3	115,0	230,0
11857	4 G 4	12	13,8	154,0	310,0
11858	5 G 4	12	15,3	192,0	410,0
11859	7 G 4	12	16,8	269,0	540,0
11860	12 G 4	12	22,9	461,0	860,0
11861	3 G 6	10	14,1	173,0	370,0
11862	4 G 6	10	15,6	230,0	430,0
11863	5 G 6	10	17,3	288,0	650,0
11864	7 G 6	10	19,3	403,0	860,0
11865	3 G 10	8	16,5	288,0	660,0
11866	4 G 10	8	18,4	384,0	790,0
11867	5 G 10	8	20,5	480,0	960,0
11868	7 G 10	8	22,5	672,0	1300,0
11869	3 G 16	6	19,6	288,0	660,0
11870	4 G 16	6	21,7	614,0	1100,0
11871	5 G 16	6	24,2	768,0	1600,0
11872	7 G 16	6	25,7	1075,0	1890,0
11873	3 G 25	4	24,0	720,0	1450,0
11874	4 G 25	4	26,9	960,0	1600,0
11875	5 G 25	4	29,3	1200,0	2050,0
11876	7 G 25	4	32,6	1680,0	2900,0

Part No. Colour grey	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
11909	12 G 1,5	16	16,6	173,0	370,0
11910	18 G 1,5	16	19,7	259,0	520,0
11911	25 G 1,5	16	23,9	360,0	730,0
11912	2 x 2,5	14	9,4	48,0	160,0
11913	3 G 2,5	14	9,9	72,0	175,0
11914	4 G 2,5	14	11,1	96,0	203,0
11915	5 G 2,5	14	12,4	120,0	251,0
11916	7 G 2,5	14	15,0	168,0	330,0
11917	12 G 2,5	14	18,4	288,0	553,0
11918	18 G 2,5	14	22,0	432,0	795,0
11919	25 G 2,5	14	26,9	600,0	1110,0
11920	2 x 4	12	11,4	77,0	180,0
11921	3 G 4	12	12,3	115,0	230,0
11922	4 G 4	12	13,8	154,0	310,0
11923	5 G 4	12	15,3	192,0	410,0
11924	7 G 4	12	16,8	269,0	540,0
11925	12 G 4	12	22,9	461,0	860,0
11926	3 G 6	10	14,1	173,0	370,0
11927	4 G 6	10	15,6	230,0	430,0
11928	5 G 6	10	17,3	288,0	650,0
11929	7 G 6	10	19,3	403,0	860,0
11930	3 G 10	8	16,5	288,0	660,0
11931	4 G 10	8	18,4	384,0	790,0
11932	5 G 10	8	20,5	480,0	960,0
11933	7 G 10	8	22,5	672,0	1300,0
11934	3 G 16	6	19,6	288,0	660,0
11935	4 G 16	6	21,7	614,0	1100,0
11936	5 G 16	6	24,2	768,0	1600,0
11937	7 G 16	6	25,7	1075,0	1890,0
11938	3 G 25	4	24,0	720,0	1450,0
11939	4 G 25	4	26,9	960,0	1600,0
11940	5 G 25	4	29,3	1200,0	2050,0
11941	7 G 25	4	32,6	1680,0	2900,0

Dimensions and specifications may be changed without prior notice.

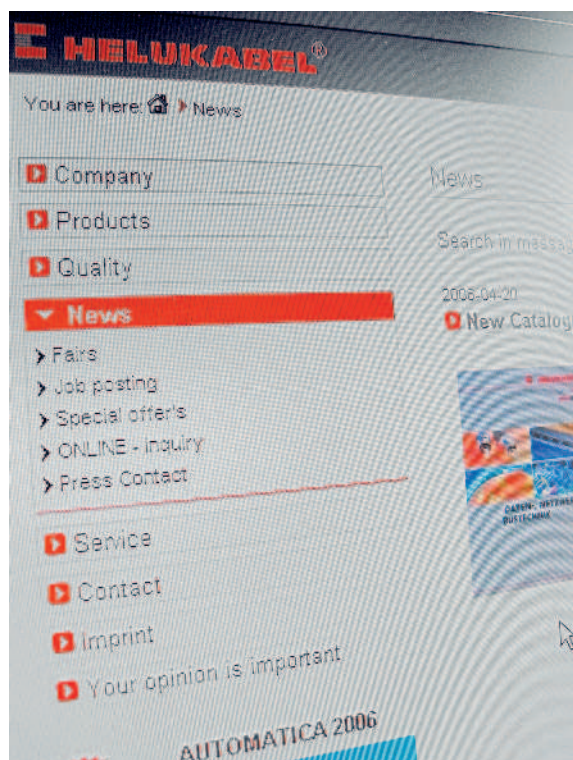

## Our Service on the Internet:

### News

Here you will find current information on the subjects of

- Fairs
- Job posting
- Online-inquiry
- Press contact
- Special offers

Click on the topic to get more information.

[www.helukabel.de](http://www.helukabel.de)