


MULTISPEED® 500-TPE high flexible, safety against high bending in drag chain systems, low torsion, halogen-free



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
24209	2 x 1	5,2	19,2	50,0	17
24210	3 G 1	5,4	29,0	60,0	17
24211	4 G 1	5,9	38,0	74,0	17
24212	5 G 1	6,7	48,0	86,0	17
24213	7 G 1	8,1	67,0	114,0	17
24214	12 G 1	11,8	115,0	210,0	17
24215	18 G 1	14,6	173,0	291,0	17
24216	25 G 1	16,5	240,0	380,0	17
24043	41 G 1	22,0	394,0	510,0	2
24217	3 G 1,5	6,4	43,0	84,0	16
24218	4 G 1,5	7,0	58,0	108,0	16
24219	5 G 1,5	7,8	72,0	126,0	16
24220	7 G 1,5	9,6	101,0	169,0	16
24221	12 G 1,5	14,1	173,0	299,0	16
24222	18 G 1,5	17,1	259,0	460,0	16
24223	25 G 1,5	19,3	360,0	640,0	16

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
24224	4 G 2,5	8,8	96,0	179,0	14
24225	5 G 2,5	9,8	120,0	230,0	14
24226	7 G 2,5	11,8	168,0	294,0	14
24227	12 G 2,5	17,5	288,0	510,0	14
24228	18 G 2,5	21,4	432,0	722,0	14
24229	25 G 2,5	24,0	600,0	950,0	14
24230	4 G 4	10,3	154,0	197,0	12
24231	4 G 6	11,9	231,0	320,0	10
24232	5 G 6	13,4	289,0	394,0	10
24233	4 G 10	14,7	387,0	520,0	8
24234	4 G 16	20,0	517,0	784,0	6
24235	4 G 35	24,9	1344,0	1711,0	2

Dimensions and specifications may be changed without prior notice.

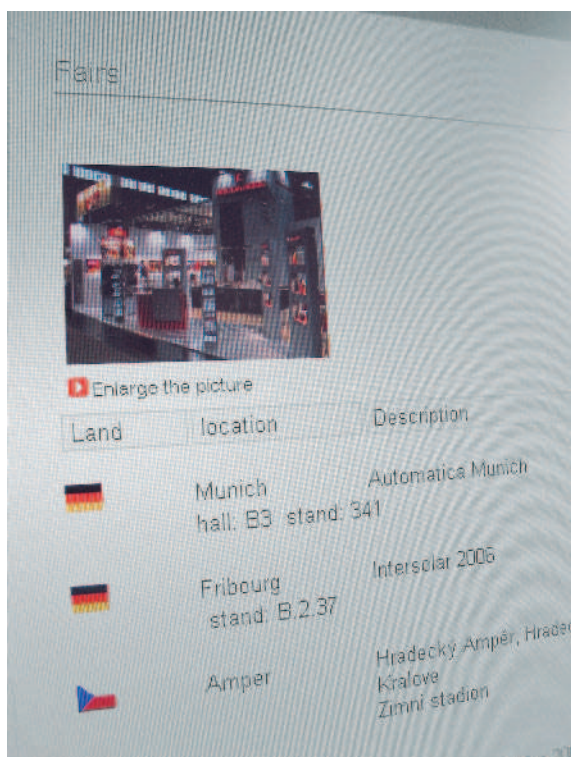

Our Service on the Internet:

Trade fair appointments

In the Internet, you will find the trade fairs we are participating in, both in Germany and abroad. Please visit our Website and arrange an appointment with us. We are looking forward to your visit.

www.helukabel.de