

# MULTISPEED® 500-C-TPE UL/CSA safety

against high bending in drag chain systems, low torsion, halogen-free,  
EMC-preferred type



Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
23931	2 x 1	18	7,4	50,0	115,0
23932	3 G 1	18	7,7	59,0	131,0
23933	4 G 1	18	8,3	70,0	160,0
23934	5 G 1	18	9,1	84,0	195,0
23935	7 G 1	18	13,3	106,0	247,0
23936	12 G 1	18	14,6	174,0	411,0
23937	18 G 1	18	17,3	240,0	547,0
23938	25 G 1	18	19,4	332,0	754,0

Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
23939	3 G 1,5	16	8,6	75,0	160,0
23940	4 G 1,5	16	9,4	90,0	194,0
23941	5 G 1,5	16	10,4	108,0	220,0
23942	7 G 1,5	16	15,2	157,0	294,0
23943	12 G 1,5	16	16,6	240,0	490,0
23944	18 G 1,5	16	20,3	355,0	704,0
23945	25 G 1,5	16	22,6	448,0	930,0
23946	4 G 2,5	14	11,3	134,0	260,0
23947	5 G 2,5	14	12,3	175,0	330,0
23948	7 G 2,5	14	14,8	229,0	406,0
23949	12 G 2,5	14	21,5	390,0	990,0

Dimensions and specifications may be changed without prior notice.

## Termination and connection sleeves


Straight low voltage / high voltage

Indoor terminations

Outdoor terminations

Core connectors for telephone and signal cables

Accessories for mean voltage

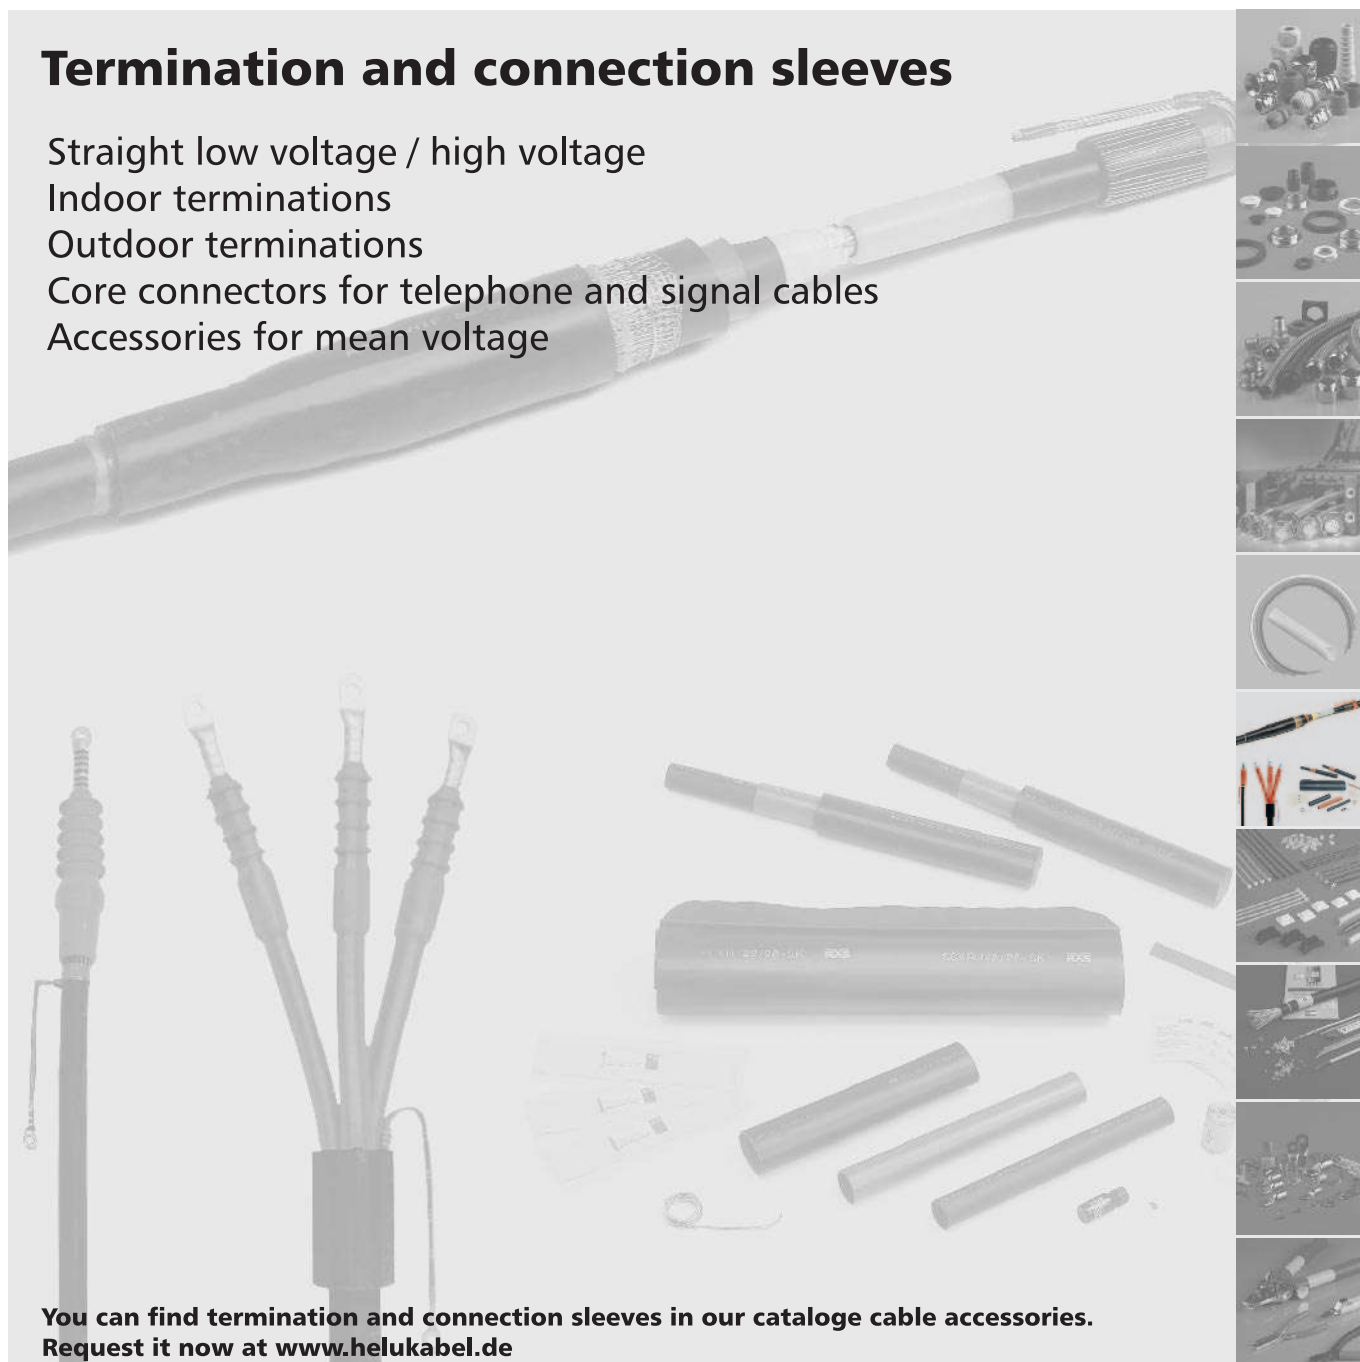

You can find termination and connection sleeves in our catalogue cable accessories.  
Request it now at [www.helukabel.de](http://www.helukabel.de)