


KOMPOFLEX® JZ-500-C halogen-free, microbes resistant, Cu-screende, EMC-preferred type

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
26273	2 x 2,5	10,0	89,0	180,0	14
26274	3 G 2,5	10,7	104,0	215,0	14
26275	4 G 2,5	11,4	134,0	268,0	14
26276	5 G 2,5	12,5	175,0	349,0	14
26277	7 G 2,5	15,0	225,0	404,0	14
26278	12 G 2,5	18,0	375,0	710,0	14
26279	18 G 2,5	21,2	522,0	891,0	14
26280	25 G 2,5	25,5	897,0	1104,0	14
26281	2 x 4	11,6	134,0	300,0	12
26282	3 G 4	12,3	178,0	340,0	12
26283	4 G 4	13,4	220,0	408,0	12
26284	5 G 4	14,8	327,0	504,0	12
26285	7 G 4	16,2	354,0	640,0	12
26286	12 G 4	21,8	661,0	894,0	12
26287	2 x 6	13,5	215,0	391,0	10
26288	3 G 6	14,2	241,0	453,0	10
26289	4 G 6	15,6	306,0	560,0	10
26290	5 G 6	17,0	437,0	680,0	10
26291	7 G 6	18,7	497,0	891,0	10

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
26292	3 G 10	17,8	370,0	730,0	8
26293	4 G 10	19,7	474,0	1004,0	8
26294	5 G 10	21,6	596,0	1170,0	8
26295	7 G 10	24,0	804,0	1405,0	8
26296	3 G 16	20,7	521,0	894,0	6
26297	4 G 16	22,6	987,0	1311,0	6
26298	5 G 16	25,2	1320,0	1550,0	6
26299	7 G 16	27,6	1575,0	1820,0	6
26300	3 G 25	26,0	1190,0	1430,0	4
26301	4 G 25	28,9	1312,0	1894,0	4
26302	5 G 25	31,8	1840,0	2272,0	4
26303	4 G 35	33,4	1590,0	2310,0	2
26304	5 G 35	37,2	1970,0	2740,0	2
26305	4 G 50	38,2	2118,0	3270,0	1
26306	5 G 50	43,0	2710,0	4080,0	1

Dimensions and specifications may be changed without prior notice.

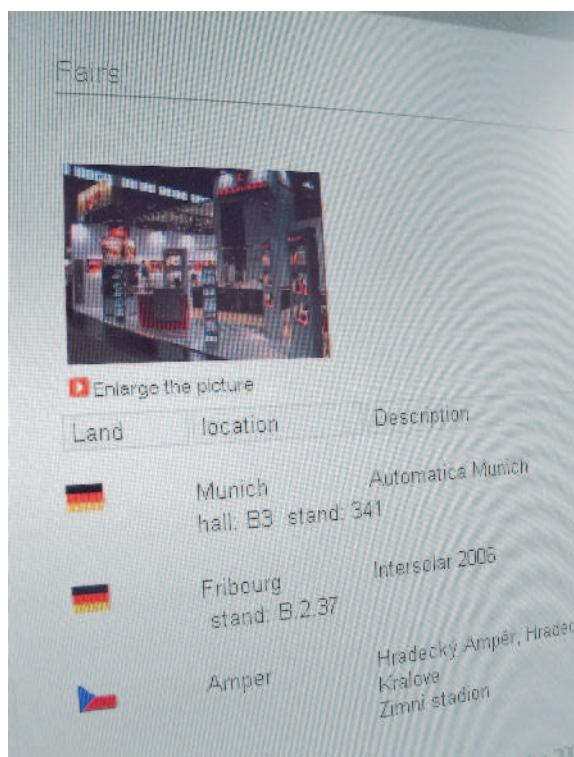

Our Service on the Internet:

Trade fair appointments

In the Internet, you will find the trade fairs we are participating in, both in Germany and abroad. Please visit our Website and arrange an appointment with us. We are looking forward to your visit.

www.helukabel.de