

JZ-602-CY EMC-preferred type, 90°C 600V, screened two approvals

control cable




Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
82941	3 G 16	6	24,4	660,0	1088,0
82942	4 G 16	6	27,4	821,0	1662,0
82943	5 G 16	6	30,8	1127,0	2021,0
82944	7 G 16	6	33,8	1512,0	2720,0
82937	3 G 25	4	30,4	1091,0	1947,0
82938	4 G 25	4	33,5	1443,0	2591,0
82939	5 G 25	4	40,0	1802,0	3197,0
82940	7 G 25	4	40,8	2520,0	4530,0
82934	3 G 35	2	34,0	1501,0	2701,0
82935	4 G 35	2	37,9	1889,0	3277,0
82936	5 G 35	2	41,7	2532,0	4530,0
82488	3 G 50	1	35,0	1621,0	2870,0
82780	4 G 50	1	40,5	2474,0	3960,0
82781	5 G 50	1	44,4	2794,0	4371,0

Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
82782	3 G 70	2/0	41,4	2288,0	3647,0
82783	4 G 70	2/0	46,1	3120,0	4882,0
82914	5 G 70	2/0	50,6	3705,0	5876,0
82915	3 G 95	3/0	46,2	3094,0	4751,0
82916	4 G 95	3/0	50,7	4043,0	6368,0
82917	5 G 95	3/0	56,1	5026,0	7843,0
82918	3 G 120	4/0	52,0	3812,0	5899,0
82919	4 G 120	4/0	57,0	5069,0	8010,0
82920	5 G 120	4/0	62,7	5877,0	9205,0

Dimensions and specifications may be changed without prior notice.

A

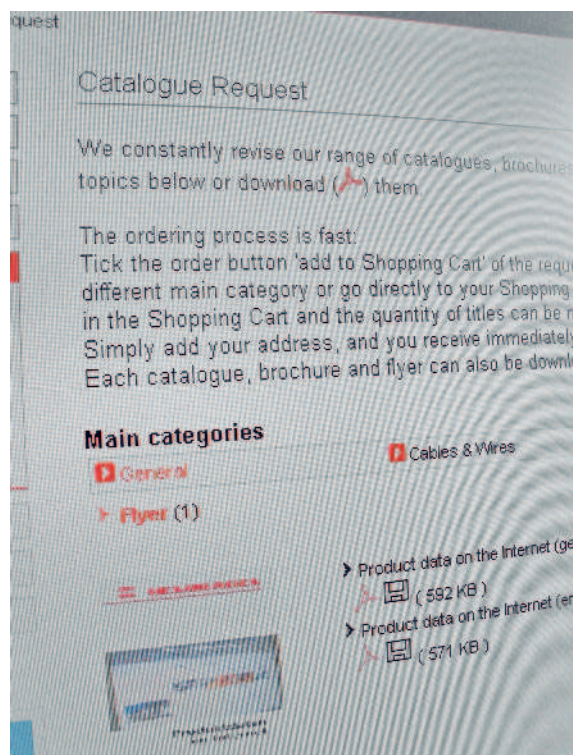

Our Service on the Internet:

Catalogue, brochure and flyer requests

Here you can request catalogues, brochures and flyers or download them immediately as pdf-documents. Just click and order.

www.helukabel.de