


JZ-600-YC-PUR tear and coolant resistant, 0,6/1kV, Cu-screened, EMC-preferred type



| Part No. Colour black | No. cores x cross-sec. mm² | AWG-no. | Outer ø ca. mm | Cop. weight kg / km | Weight ca. kg / km |
|-----------------------------|----------------------------------|---------|-------------------|---------------------------|-----------------------|
| 28394 | 2 x 1,5 | 16 | 10,7 | 68,0 | 166,0 |
| 28395 | 3 G 1,5 | 16 | 11,2 | 84,0 | 192,0 |
| 28396 | 4 G 1,5 | 16 | 12,3 | 104,0 | 246,0 |
| 28397 | 5 G 1,5 | 16 | 13,3 | 123,0 | 294,0 |
| 28398 | 7 G 1,5 | 16 | 16,0 | 180,0 | 392,0 |
| 28399 | 12 G 1,5 | 16 | 19,6 | 284,0 | 599,0 |
| 28400 | 18 G 1,5 | 16 | 23,4 | 390,0 | 817,0 |
| 28401 | 25 G 1,5 | 16 | 28,2 | 521,0 | 1261,0 |
| | | | | | |
| 28402 | 2 x 2,5 | 14 | 11,8 | 99,0 | 280,0 |
| 28403 | 3 G 2,5 | 14 | 12,3 | 124,0 | 301,0 |
| 28404 | 4 G 2,5 | 14 | 13,4 | 170,0 | 352,0 |
| 28405 | 5 G 2,5 | 14 | 14,9 | 202,0 | 433,0 |
| 28406 | 7 G 2,5 | 14 | 17,9 | 268,0 | 569,0 |
| 28407 | 12 G 2,5 | 14 | 21,9 | 423,0 | 864,0 |
| 28408 | 18 G 2,5 | 14 | 26,1 | 572,0 | 1365,0 |
| 28409 | 25 G 2,5 | 14 | 31,9 | 740,0 | 1997,0 |
| | | | | | |
| 28410 | 2 x 4 | 12 | 14,3 | 156,0 | 310,0 |
| 28411 | 3 G 4 | 12 | 15,1 | 191,0 | 396,0 |
| 28412 | 4 G 4 | 12 | 16,7 | 236,0 | 531,0 |
| 28413 | 5 G 4 | 12 | 18,6 | 303,0 | 704,0 |
| 28414 | 7 G 4 | 12 | 20,0 | 394,0 | 932,0 |
| | | | | | |
| 28415 | 3 G 6 | 10 | 17,0 | 251,0 | 633,0 |
| 28416 | 4 G 6 | 10 | 18,7 | 319,0 | 742,0 |
| 28417 | 5 G 6 | 10 | 20,7 | 421,0 | 1117,0 |
| | | | | | |
| 28418 | 3 G 10 | 8 | 19,6 | 371,0 | 1131,0 |
| 28419 | 4 G 10 | 8 | 21,9 | 576,0 | 1357,0 |
| 28420 | 5 G 10 | 8 | 24,1 | 620,0 | 1646,0 |
| | | | | | |
| 28421 | 3 G 16 | 6 | 23,5 | 540,0 | 1397,0 |
| 28422 | 4 G 16 | 6 | 26,4 | 807,0 | 1880,0 |
| 28423 | 5 G 16 | 6 | 28,8 | 1394,0 | 2721,0 |

| Part No. Colour grey | No. cores x cross-sec. mm² | AWG-no. | Outer ø ca. mm | Cop. weight kg / km | Weight ca. kg / km |
|----------------------------|----------------------------------|---------|-------------------|---------------------------|-----------------------|
| 28454 | 2 x 1,5 | 16 | 10,7 | 68,0 | 166,0 |
| 28455 | 3 G 1,5 | 16 | 11,2 | 84,0 | 192,0 |
| 28456 | 4 G 1,5 | 16 | 12,3 | 104,0 | 246,0 |
| 28457 | 5 G 1,5 | 16 | 13,3 | 123,0 | 294,0 |
| 28458 | 7 G 1,5 | 16 | 16,0 | 180,0 | 392,0 |
| 28459 | 12 G 1,5 | 16 | 19,6 | 284,0 | 599,0 |
| 28460 | 18 G 1,5 | 16 | 23,4 | 390,0 | 817,0 |
| 28461 | 25 G 1,5 | 16 | 28,2 | 521,0 | 1261,0 |
| | | | | | |
| 28462 | 2 x 2,5 | 14 | 11,8 | 99,0 | 280,0 |
| 28463 | 3 G 2,5 | 14 | 12,3 | 124,0 | 301,0 |
| 28464 | 4 G 2,5 | 14 | 13,4 | 170,0 | 352,0 |
| 28465 | 5 G 2,5 | 14 | 14,9 | 202,0 | 433,0 |
| 28466 | 7 G 2,5 | 14 | 17,9 | 268,0 | 569,0 |
| 28467 | 12 G 2,5 | 14 | 21,9 | 423,0 | 864,0 |
| 28468 | 18 G 2,5 | 14 | 26,1 | 572,0 | 1365,0 |
| 28469 | 25 G 2,5 | 14 | 31,9 | 740,0 | 1997,0 |
| | | | | | |
| 28470 | 2 x 4 | 12 | 14,3 | 156,0 | 310,0 |
| 28471 | 3 G 4 | 12 | 15,1 | 191,0 | 396,0 |
| 28472 | 4 G 4 | 12 | 16,7 | 236,0 | 531,0 |
| 28473 | 5 G 4 | 12 | 18,6 | 303,0 | 704,0 |
| 28474 | 7 G 4 | 12 | 20,0 | 394,0 | 932,0 |
| | | | | | |
| 28475 | 3 G 6 | 10 | 17,0 | 251,0 | 633,0 |
| 28476 | 4 G 6 | 10 | 18,7 | 319,0 | 742,0 |
| 28477 | 5 G 6 | 10 | 20,7 | 421,0 | 1117,0 |
| | | | | | |
| 28478 | 3 G 10 | 8 | 19,6 | 371,0 | 1131,0 |
| 28479 | 4 G 10 | 8 | 21,9 | 576,0 | 1357,0 |
| 28480 | 5 G 10 | 8 | 24,1 | 620,0 | 1646,0 |
| | | | | | |
| 28481 | 3 G 16 | 6 | 23,5 | 540,0 | 1397,0 |
| 28482 | 4 G 16 | 6 | 26,4 | 807,0 | 1880,0 |
| 28483 | 5 G 16 | 6 | 28,8 | 1394,0 | 2721,0 |

Dimensions and specifications may be changed without prior notice.

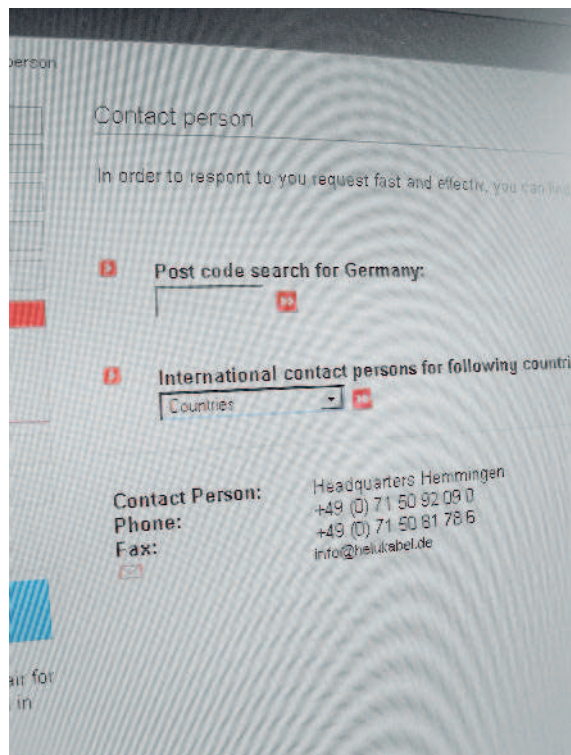

Our Service on the Internet:

Contact person

Enter your postal code to find out your personal customer sales consultant, who serves as your contact for questions and offers. Simply click and check it out. We are looking forward to hearing from you.

www.helukabel.de