

TOPSERV® 113 / 127 according to Siemens-Standard

6FX 8008- bzw. 6FX 7008-, high flexible drag chain servo cable, VDE-Reg.-No. 0,6/1kV



TOPSERV® 113

according to SIEMENS Standard 6FX 8008-


Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
74508	(4 x 4,0 + (2 x 1,0))	14,6	258,0	462,0	12
78950	(4 x 4,0 + (2 x 1,5))	14,9	268,0	475,0	12
74514	(4 x 6,0 + (2 x 1,0))	16,8	348,0	596,0	10
78951	(4 x 6,0 + (2 x 1,5))	17,0	358,0	607,0	10
74509	(4 x 10,0 + (2 x 1,0))	20,0	574,0	912,0	8
78952	(4 x 10,0 + (2 x 1,5))	20,0	584,0	922,0	8
74510	(4 x 16,0 + (2 x 1,0))	23,5	815,0	1194,0	6
75956	(4 x 16,0 + (2 x 1,5))	23,5	825,0	1205,0	6
74511	(4 x 25,0 + (2 x 1,0))	27,0	1273,0	1499,0	4
75957	(4 x 25,0 + (2 x 1,5))	27,0	1283,0	1510,0	4
74512	(4 x 35,0 + (2 x 1,0))	31,4	1840,0	1992,0	2
75958	(4 x 35,0 + (2 x 1,5))	31,4	1850,0	2005,0	2
74513	(4 x 50,0 + (2 x 1,0))	35,0	2530,0	2880,0	1
75959	(4 x 50,0 + (2 x 1,5))	35,0	2540,0	2890,0	1

TOPSERV® 127

according to SIEMENS Standard 6FX 8008-, for linear drives

Part No.	No. cores x cross-sec. mm²	SIEMENS Part No.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
700635	(4 x 6,0 + 4 x 0,5)	6FX7008-1BC41	18,5	350,0	593,0	10
700636	(4 x 10,0 + 4 x 0,5)	6FX7008-1BC51	22,5	550,0	882,0	8
700637	(4 x 16,0 + 4 x 0,5)	6FX7008-1BC61	26,0	770,0	1230,0	6

Dimensions and specifications may be changed without prior notice.

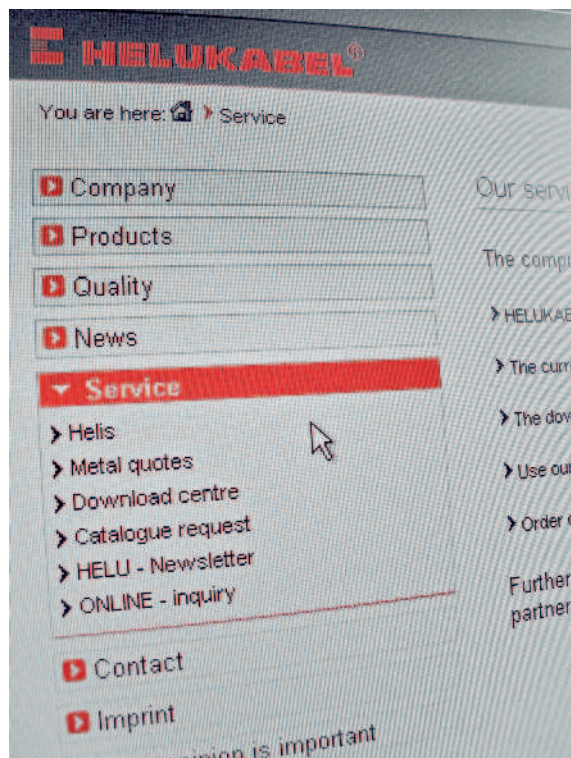

Our Service on the Internet:

Service

Through our service area, you will reach HELIS, the HELUKABEL Information System. Here you can find out the most important metal prices, receive important documents in the Download Centre, request documents and the newsletter.

www.helukabel.de