


MOTORFLEX-EMV 3/3 triple-screened, low capacitance, 80°C, 600V, PUR flexible motor supply cable



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Coupling resistance		Power ratings **)	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
			with 1 MHz Ohm/km	with 30 MHz Ohm/km	with 3 loaded cores in Ampère			
78614	(3 x 1,5 + 3 x 0,25)	10,4			18,0	100	150,0	16
78615	(3 x 2,5 + 3 x 0,5)	12,1	18,0	210,0	26,0	160	240,0	14
78616	(3 x 4,0 + 3 x 0,75)	13,9	11,0	210,0	34,0	245	345,0	12
78617	(3 x 6,0 + 3 x 1,0)	15,5	6,0	150,0	44,0	335	460,0	10
78618	(3 x 10,0 + 3 x 1,5)	19,5	7,0	180,0	61,0	750	840,0	8
78619	(3 x 16,0 + 3 x 2,5)	22,5	9,0	190,0	82,0	820	930,0	6
78620	(3 x 25,0 + 3 x 4,0)	28,6	4,0	95,0	108,0	1180	1425,0	4
78621	(3 x 35,0 + 3 x 6,0)	29,6	3,0	85,0	135,0	1700	1900,0	2
78622	(3 x 50,0 + 3 x 10,0)	35,7	2,0	40,0	168,0	2400	2650,0	1
78623	(3 x 70,0 + 3 x 10,0)	43,0	2,0	45,0	207,0	3300	4400,0	2/0
78624	(3 x 95,0 + 3 x 16,0)	47,0	1,0	50,0	250,0	4500	5300,0	3/0
78625	(3 x 120,0 + 3 x 16,0)	52,0			292,0	5500	6300,0	4/0
78626	(3 x 150,0 + 3 x 25,0)	58,0			335,0	6260	7200,0	300 kcmil

Dimensions and specifications may be changed without prior notice.

***) The current carrying capacity for permanent operation at ambient temperature of 30°C. For deviating ambient temperatures the conversion factors should be used and for further see the indication in DIN VDE 0298 part 4.

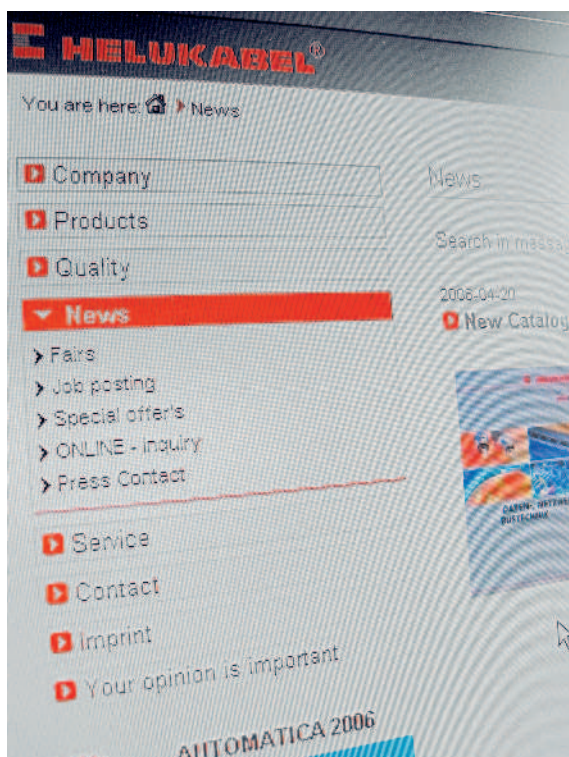

Our Service on the Internet:

News

Here you will find current information on the subjects of

- Fairs
- Job posting
- Online-inquiry
- Press contact
- Special offers

Click on the topic to get more information.

www.helukabel.de