

TOPGEBER 504 / 511

according to Siemens Standard 6FX 5008- low capacitance (ca. 70nF/km),
flexible feedback cable, low capacitance (ca. 40nF/km), PVC



TOPGEBER 504

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
74450	(5 x 0,22)	5,3	24,0	51,0	24
74405	(3 x 2 x 0,22)	6,6	35,0	62,0	24
74406	(4 x 2 x 0,22)	7,1	38,0	77,0	24
700241	(4 x 2 x 0,22)	7,8	38,0	85,0	24
74407	(5 x 2 x 0,22)	7,5	47,0	95,0	24


TOPGEBER 504

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
700601	(6 x 2 x 0,22)	8,5	66,0	112,0	24
700602	(8 x 2 x 0,22)	8,9	83,0	121,0	24
700603	(10 x 2 x 0,22)	10,5	96,0	143,0	24
700604	(12 x 2 x 0,22)	11,0	115,0	197,0	24
700605	(18 x 2 x 0,22)	13,3	172,0	285,0	24
700606	(25 x 2 x 0,22)	14,9	255,0	345,0	24

TOPGEBER 511

Part No.	No. cores x cross-sec. mm²	SIEMENS Part No.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
700639	(4 x 2 x 0,25)		8,4	43	89,0	24
700643	(3 x 2 x 0,14 + 4 x 0,14 + 4 x 0,23 + 2 x 0,5)		9,5	690	250,0	26
700640	(3 x 2 x 0,14 + 2 x 0,5)		7,2	35	80,0	26
700642	(3 x 2 x 0,14 + 4 x 0,14 + 2 x 0,5)		8,9	63	190,0	26
700644	(12 x 0,22)		7,5	65	90,0	24
700641	(4 x 2 x 0,38 + 4 x 0,5)		9,0	76	150,0	21

Dimensions and specifications may be changed without prior notice.

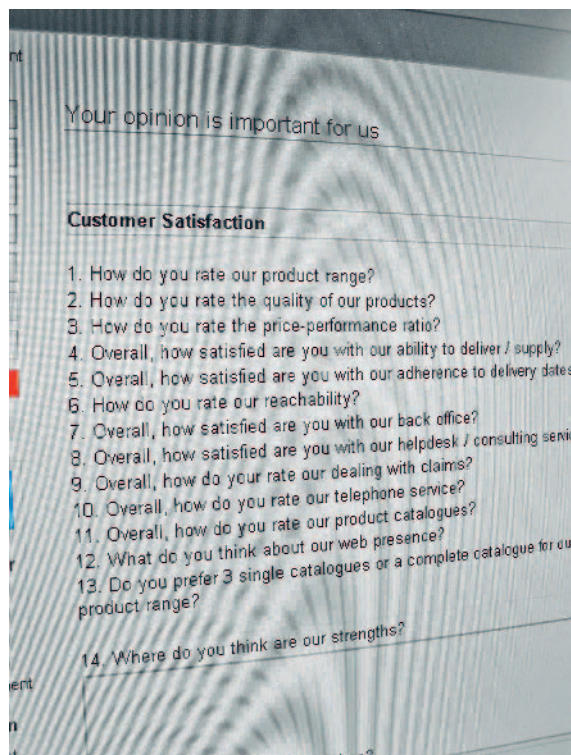

Our Service on the Internet:

Your opinion is important to us

The greatest possible satisfaction of our customers is our highest goal. And so your opinion, suggestions or criticism are very important to us. We would be pleased if you could fill out the catalogue of questions and send it to us.

www.helukabel.de