

THERMSERV 150 / 120 flexible ETFE 7Y-servo cable, EMC-preferred


THERMSERV 150

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
75792	(4 x 1,5 + (2 x 0,75))	9,5	110,0	240,0	16
74334	(4 x 2,5 + 2 x 0,75)	10,7	147,6	310,0	14
75793	(4 x 4,0 + (2 x 1,0))	12,4	258,0	462,0	12
75794	(4 x 6,0 + (2 x 1,0))	13,6	348,0	596,0	10
700481	(4 x 10,0 + (2 x 1,0))	18,2	609,0	895,0	8
700482	(4 x 16,0 + (2 x 1,0))	20,5	894,0	1175,0	6

THERMSERV 120

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
79882	(4 x 1,5 + (2 x 0,5))	9,5	128,0	245,0	16
79883	(5 x 2 x 0,25 + 2 x 0,75)	9,8	104,0	225,0	24
700483	(4 x 1,5 + (2 x 1,0))	11,4	138,0	254,0	16
700484	(4 x 1,5 + 2 x 1,5)	12,2	148,0	265,0	16
700485	(4 x 2,5 + (2 x 1,0))	13,8	177,0	328,0	14
700486	(4 x 2,5 + (2 x 1,5))	14,5	187,0	359,0	14
700487	(4 x 4,0 + (2 x 1,0))	15,0	258,0	462,0	12
700488	(4 x 4,0 + (2 x 1,5))	15,5	268,0	475,0	12
700489	(4 x 6,0 + (2 x 1,0))	16,5	348,0	596,0	10
700490	(4 x 6,0 + (2 x 1,5))	16,8	358,0	607,0	10
700491	(4 x 10,0 + (2 x 1,0))	21,6	574,0	912,0	8
700492	(4 x 10,0 + (2 x 1,5))	21,6	584,0	865,0	8
700493	(4 x 16,0 + (2 x 1,0))	24,8	815,0	1194,0	6
700494	(4 x 16,0 + (2 x 1,5))	24,8	825,0	1205,0	6
700495	(4 x 25,0 + (2 x 1,0))	26,5	1273,0	1499,0	4
700496	(4 x 25,0 + (2 x 1,5))	26,5	1283,0	1510,0	4
700497	(4 x 35,0 + (2 x 1,0))	32,0	1840,0	1992,0	2
700498	(4 x 35,0 + (2 x 1,5))	32,0	1850,0	2005,0	2
700499	(4 x 50,0 + (2 x 1,0))	35,8	2530,0	2880,0	1
700500	(4 x 50,0 + (2 x 1,5))	35,8	2540,0	2890,0	1

Dimensions and specifications may be changed without prior notice.

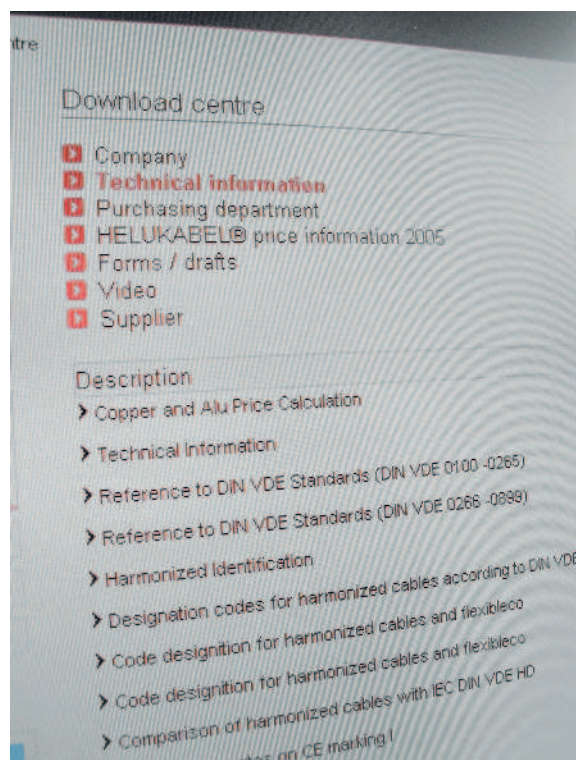

Our Service on the Internet:

Download-Centre

Here you will find interesting and informative documents in pdf form for download on the subjects of

- companies
- technical data
- public bidding forms
- current flyers/brochures, etc.

www.helukabel.de