

Sensorflex-H sensor actuator cables, halogen-free, high flexible drag chain cable, PUR, EVA +125°C



Sensorflex-H (LI9Y11Y) high flexible drag chain cable, PUR


Part No.	Jacket colour	Cable structure No. cores x cross-sec. mm ²	Jacket material	Core colours	Fine wire	High flex**	Outer ø ca. mm	Cop. weight kg/km	Weight ca. kg/km	AWG-No.
75801	Grey RAL 7001	3 x 0,25	PUR	brown, blue, black		X	4,5	7	22,0	24
77468	Grey RAL 7001	4 x 0,25	PUR	brown, blue, black, white		X	4,7	9	26,0	24
76705	Grey RAL 7001	8 x 0,25	PUR	DIN 47100		X	6,0	19	49,0	24
77427	Grey RAL 7001	4 x 0,34	PUR	brown, blue, black, white		X	4,9	13	43,0	22
78275	Grey RAL 7001	3 x 0,75	PUR	JZ, black with numbering + greenyellow		X	6,2	21	54,0	18
77428	Grey RAL 7001	3 x 0,75	PUR	JZ, black with numbering + greenyellow		X	6,2	21	54,0	18
77429	Grey RAL 7001	4 x 0,75	PUR	JZ, black with numbering + greenyellow		X	6,2	28	66,0	18

Sensorflex-H (LI4G4G) unqualified for drag chain cable, sheath EVA

Part No.	Jacket colour	Cable structure No. cores x cross-sec. mm ²	Jacket material	Core colours	Fine wire	High flex**	Outer ø ca. mm	Cop. weight kg/km	Weight ca. kg/km	AWG-No.
78359	Red-brown RAL 8016	4 x 0,75	EVA	brown, blue, black, green-yellow	X		7,0	28,8	65,0	18
73575	Red-brown RAL 8016	3 x 1,0	EVA	brown, blue, green-yellow	X		7,0	29,0	60,0	17

Dimensions and specifications may be changed without prior notice.

B

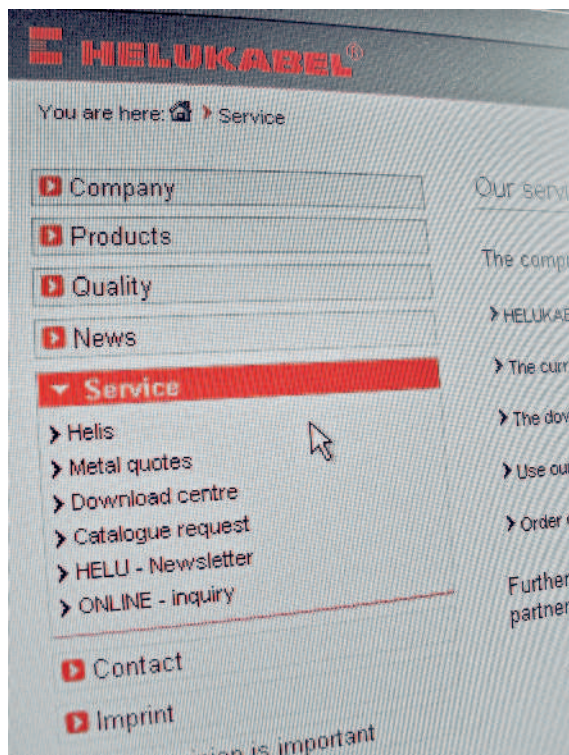

Our Service on the Internet:

Service

Through our service area, you will reach HELIS, the HELUKABEL Information System. Here you can find out the most important metal prices, receive important documents in the Download Centre, request documents and the newsletter.

www.helukabel.de