


# H05 V-K, H07 V-K

## PVC-Single Cores to VDE 0281

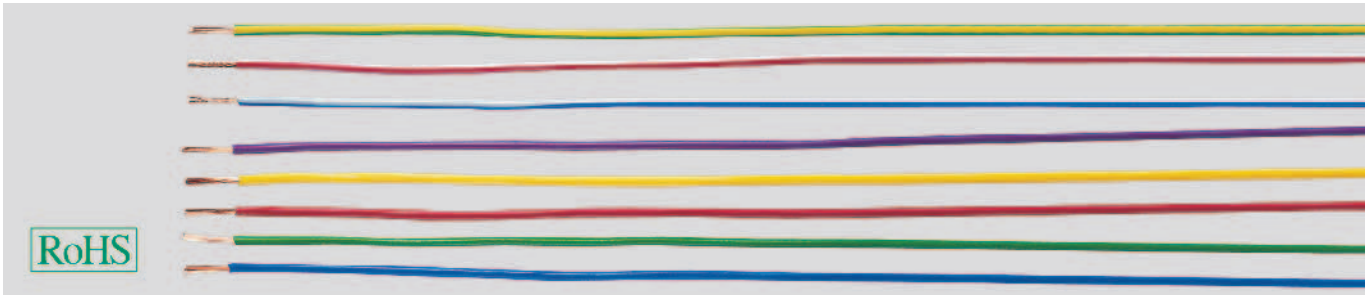

CE = The product is conformed with the EC Low-Voltage Directive 73/23/EWG and 93/68/EWG.

### Barrels, one-way barrels or barrels on hire

Type cross section mm <sup>2</sup>	one-way cardboard 8-on guar dimension in mm	ca. contents in m
<b>LIY</b>		
0,25	500 x 500 x 420	10000
0,50	500 x 500 x 420	7000
0,75	500 x 500 x 420	5000
1,00	500 x 500 x 420	4000
1,50	500 x 500 x 420	3000

price EUR/cardboard 6,- EUR

Type cross section mm <sup>2</sup>	one-way barrels 8-on guar dimension in mm	ca. contents in m
<b>H05 V-K H07 V-K</b>		
0,50	400 x 400 x 500	4000
0,75	400 x 400 x 500	3500
1,00	400 x 400 x 500	3000
1,50	400 x 400 x 500	2000
2,50	400 x 400 x 500	1200
4,00	400 x 400 x 500	900
6,00	400 x 400 x 500	800

price EUR/barrel 5,- EUR

Type cross section mm <sup>2</sup>	one-way barrels 8-on guar dimension in mm	ca. contents in m
<b>H05 V-K H07 V-K</b>		
0,50	400 x 400 x 800	7000
0,75	400 x 400 x 800	6000
1,00	400 x 400 x 800	5200
1,50	400 x 400 x 800	3500
2,50	400 x 400 x 800	2000

price EUR/barrel 7,50 EUR



Delivery for one-way barrel

Works photo: HELUKABEL®

- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- PVC self-extinguishing and flame retardant according to DIN VDE 0482 part 265-2-1/EN 50265-2-1/IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

K = Fine stranded conductor