


NHXXH-FE 180/E 90 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53006	4 x 1,5 re	15,0	58,0	325,0	16
53007	4 x 2,5 re	16,0	96,0	385,0	14
53008	4 x 4 re	17,0	154,0	470,0	12
53009	4 x 6 re	18,0	230,0	580,0	10
53010	4 x 10 re	20,0	384,0	790,0	8
53011	4 x 16 re	22,0	614,0	1100,0	6
53012	4 x 25 re	27,0	960,0	1650,0	4
53013	4 x 35 re	30,0	1344,0	2150,0	2
53014	4 x 50 re	34,0	1920,0	2800,0	1
53030	4 x 70 re	39,0	2688,0	3800,0	2/0
53031	4 x 95 re	44,0	3648,0	5050,0	3/0
53070	4 x 120 re	47,0	4608,0	6150,0	4/0
53015	5 x 1,5 re	16,0	72,0	375,0	16
53016	5 x 2,5 re	17,0	120,0	445,0	14
53017	5 x 4 re	18,0	192,0	560,0	12
53018	5 x 6 re	20,0	288,0	690,0	10
53019	5 x 10 re	22,0	480,0	950,0	8
53020	5 x 16 re	24,0	768,0	1300,0	6
53021	5 x 25 re	29,0	1200,0	1980,0	4
53028	5 x 35 re	33,0	1680,0	2350,0	2
53029	5 x 50 re	38,0	2500,0	3100,0	1

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53022	7 x 1,5 re	19,0	101,0	560,0	16
53027	7 x 2,5 re	21,0	168,0	650,0	14
53025	10 x 1,5 re	23,0	144,0	750,0	16
53026	10 x 2,5 re	25,0	240,0	910,0	14
53023	12 x 1,5 re	25,0	173,0	850,0	16
53024	12 x 2,5 re	26,0	288,0	1000,0	14

Dimensions and specifications may be changed without prior notice.

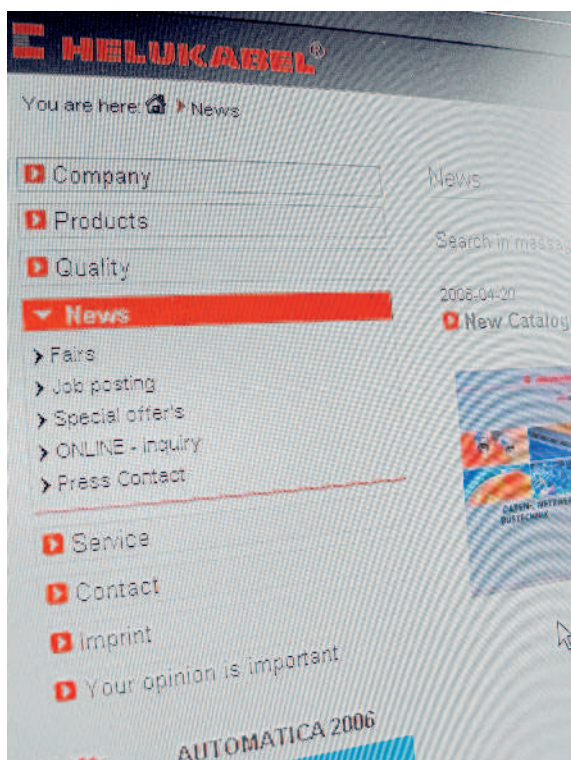

Our Service on the Internet:

News

Here you will find current information on the subjects of

- Fairs
- Job posting
- Online-inquiry
- Press contact
- Special offers

Click on the topic to get more information.

www.helukabel.de