


JZ-500 HMMH-C flexible control cable, halogen-free, extremely fire resistant, oil resistant ¹⁾, Cu-screened, EMC-preferred type



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
11689	25 G 0,75	14,8	275,8	413,0	18
11700	2 x 1	6,4	46,3	66,0	17
11701	3 G 1	6,7	56,4	80,0	17
11348	3 x 1	6,7	56,4	80,0	17
11702	4 G 1	7,3	69,7	100,0	17
11349	4 x 1	7,3	69,7	100,0	17
11703	5 G 1	7,8	85,4	130,0	17
11704	7 G 1	9,1	107,3	160,0	17
11707	12 G 1	11,2	187,0	260,0	17
11709	18 G 1	13,2	253,5	382,0	17
11711	25 G 1	15,8	342,6	540,0	17
11722	2 x 1,5	6,6	63,3	88,0	16
11723	3 G 1,5	6,9	76,2	100,0	16
11350	3 x 1,5	6,9	76,2	100,0	16
11724	4 G 1,5	7,5	96,2	125,0	16
11725	5 G 1,5	8,4	111,5	158,0	16
11726	7 G 1,5	10,0	148,0	210,0	16
11729	12 G 1,5	12,1	254,5	340,0	16
11731	18 G 1,5	14,6	367,7	480,0	16
11733	25 G 1,5	17,6	492,4	702,0	16
11744	2 x 2,5	8,3	96,4	132,0	14
11745	3 G 2,5	9,0	148,5	168,0	14
11746	4 G 2,5	9,8	174,2	195,0	14
11747	5 G 2,5	10,9	200,8	222,0	14
11748	7 G 2,5	12,9	235,6	345,0	14
11751	12 G 2,5	15,9	441,0	572,0	14
11766	2 x 4	9,8	135,5	184,0	12
11768	3 G 4	10,6	178,1	238,0	12
11769	4 G 4	11,5	220,3	305,0	12
11770	5 G 4	12,7	328,0	388,0	12
11771	7 G 4	14,0	355,2	504,0	12
11781	2 G 6	11,5	175,3	270,0	10
11782	3 G 6	12,4	240,0	328,0	10
11783	4 G 6	13,8	305,7	416,0	10
11784	5 G 6	15,7	441,8	510,0	10
11785	7 G 6	16,6	506,0	670,0	10

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
11786	2 x 10	14,9	265,2	420,0	8
11787	3 G 10	15,9	370,5	495,0	8
11788	4 G 10	17,8	486,0	785,0	8
11789	5 G 10	19,6	611,2	855,0	8
11790	7 G 10	21,6	820,5	1308,0	8
11793	4 G 16	20,8	810,2	882,0	6
11794	5 G 16	22,9	1050,7	1293,0	6
11812	7 G 16	25,0	1183,0	2149,0	6
11795	3 G 25	23,2	792,0	1432,0	4
11796	4 G 25	26,2	1280,0	1911,0	4
11797	5 G 25	29,4	1440,0	2414,0	4
11798	3 G 35	25,7	1110,0	1914,0	2
11799	4 G 35	30,4	1690,0	2542,0	2
11800	5 G 35	33,8	1930,0	3180,0	2
11801	3 G 50	30,0	1584,0	3080,0	1
11802	4 G 50	34,6	2315,0	3550,0	1
11803	5 G 50	38,8	2694,0	4753,0	1
11804	3 G 70	37,6	2218,0	3840,0	2/0
11805	4 G 70	41,3	3020,0	4939,0	2/0
11806	5 G 70	46,1	3696,0	6572,0	2/0
11807	3 G 95	41,2	3010,0	5651,0	3/0
11808	4 G 95	46,2	4013,0	6690,0	3/0
11809	5 G 95	51,2	5016,0	8370,0	3/0
11810	3 G 120	46,5	3802,0	6342,0	4/0
11811	4 G 120	51,0	5067,0	8453,0	4/0

Dimensions and specifications may be changed without prior notice.

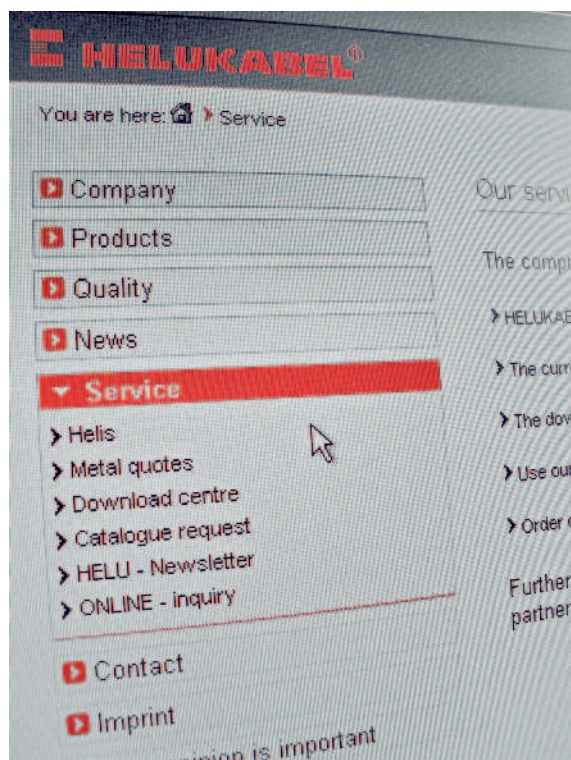

Our Service on the Internet:

Service

Through our service area, you will reach HELIS, the HELUKABEL Information System. Here you can find out the most important metal prices, receive important documents in the Download Centre, request documents and the newsletter.

www.helukabel.de