

JZ-600 HMMH-C flexible control cable, halogen-free, extremely fire resistant, oil resistant ¹⁾, 0,6/1kV, screened, EMC-preferred type

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
12891	3 G 10	19,6	806,4	1125,0	8
12892	4 G 10	21,9	1036,8	1345,0	8
12893	5 G 10	24,1	1296,0	1635,0	8
12894	4 G 16	23,5	1244,7	1395,0	6
12895	5 G 16	26,4	1657,8	1870,0	6
12896	7 G 16	28,8	2073,6	2720,0	6
12897	3 G 25	28,0	1944,0	2465,0	4
12898	4 G 25	32,5	2592,0	2750,0	4
12899	5 G 25	35,7	3240,0	3490,0	4

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
12900	3 G 35	32,7	2520,0	3230,0	2
12901	4 G 35	35,7	3360,0	4100,0	2
12902	5 G 35	40,0	4200,0	4950,0	2
12903	4 G 50	41,1	4800,0	5780,0	1
12904	4 G 70	48,0	6720,0	7480,0	2/0
12905	4 G 95	51,2	9120,0	10220,0	3/0
12906	4 G 120	56,0	11520,0	13750,0	4/0

Dimensions and specifications may be changed without prior notice.

Terminals and cable lugs

Terminals

Assortment box

Insulated termial ends


Applied pressure lugs

Tubular cable lugs

Pin lugs

Link cable lugs

Press connecting connectors

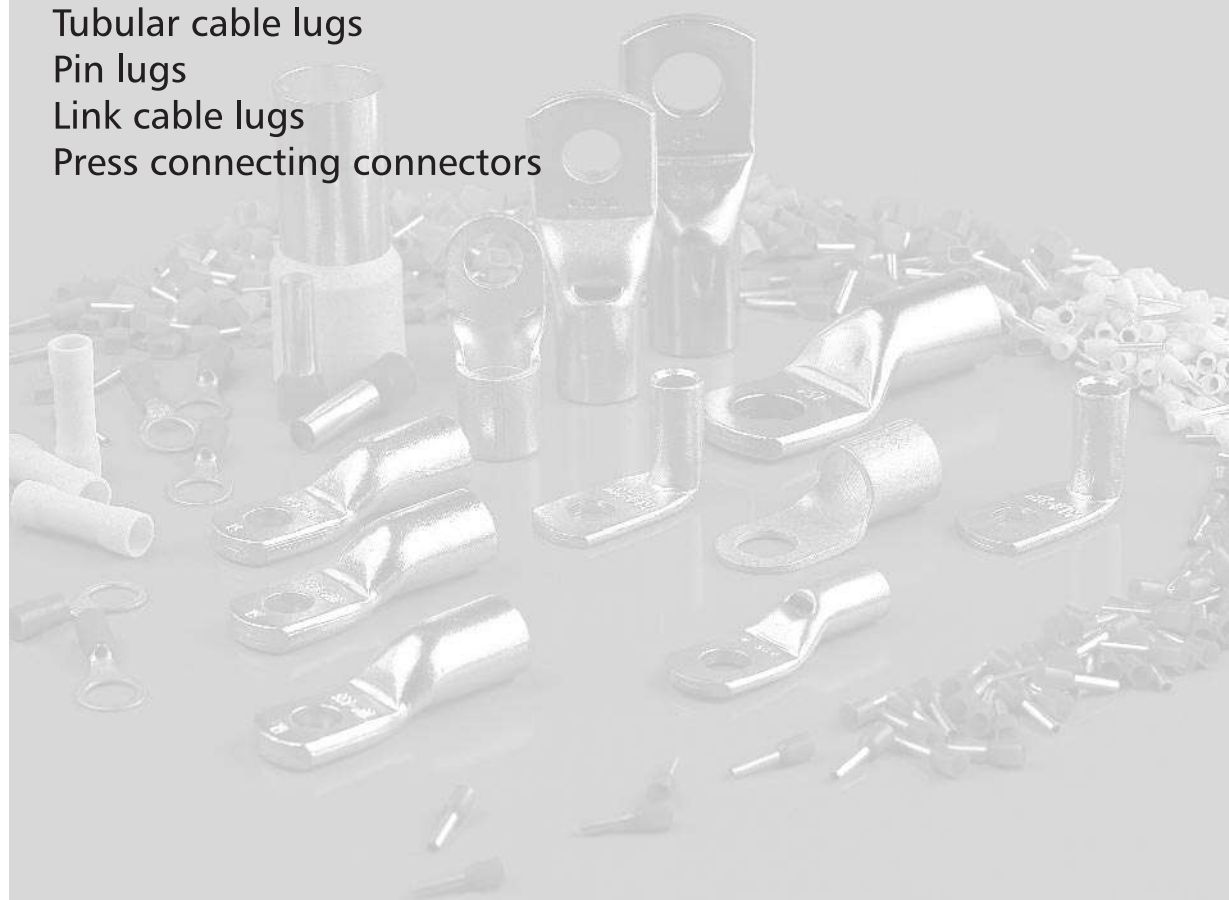

You can find terminals and cable lugs in our cataloge cable accessories.
Request it now at www.helukabel.de