

N2XCH power cable, 0,6/1kV, halogen-free, with concentric conductor, without functionality



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53234	12 x 1,5 / 2,5 re	18,4	204,0	460,0	16
53241	12 x 2,5 / 4 re	19,2	335,0	610,0	14
53247	12 x 4 / 6 re	22,6	528,0	910,0	12
53235	16 x 1,5 / 4 re	20,0	275,0	686,0	16
53242	16 x 2,5 / 6 re	20,9	450,0	805,0	14
53236	21 x 1,5 / 6 re	22,6	370,0	766,0	16
53243	21 x 2,5 / 6 re	25,2	572,0	1015,0	14

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53237	24 x 1,5 / 6 re	23,2	412,0	800,0	16
53244	24 x 2,5 / 10 re	26,1	695,0	1100,0	14
53238	30 x 1,5 / 6 re	24,3	500,0	930,0	16
53245	30 x 2,5 / 10 re	28,0	842,0	1290,0	14

Dimensions and specifications may be changed without prior notice.

Termination and connection sleeves


Straight low voltage / high voltage

Indoor terminations

Outdoor terminations

Core connectors for telephone and signal cables

Accessories for mean voltage

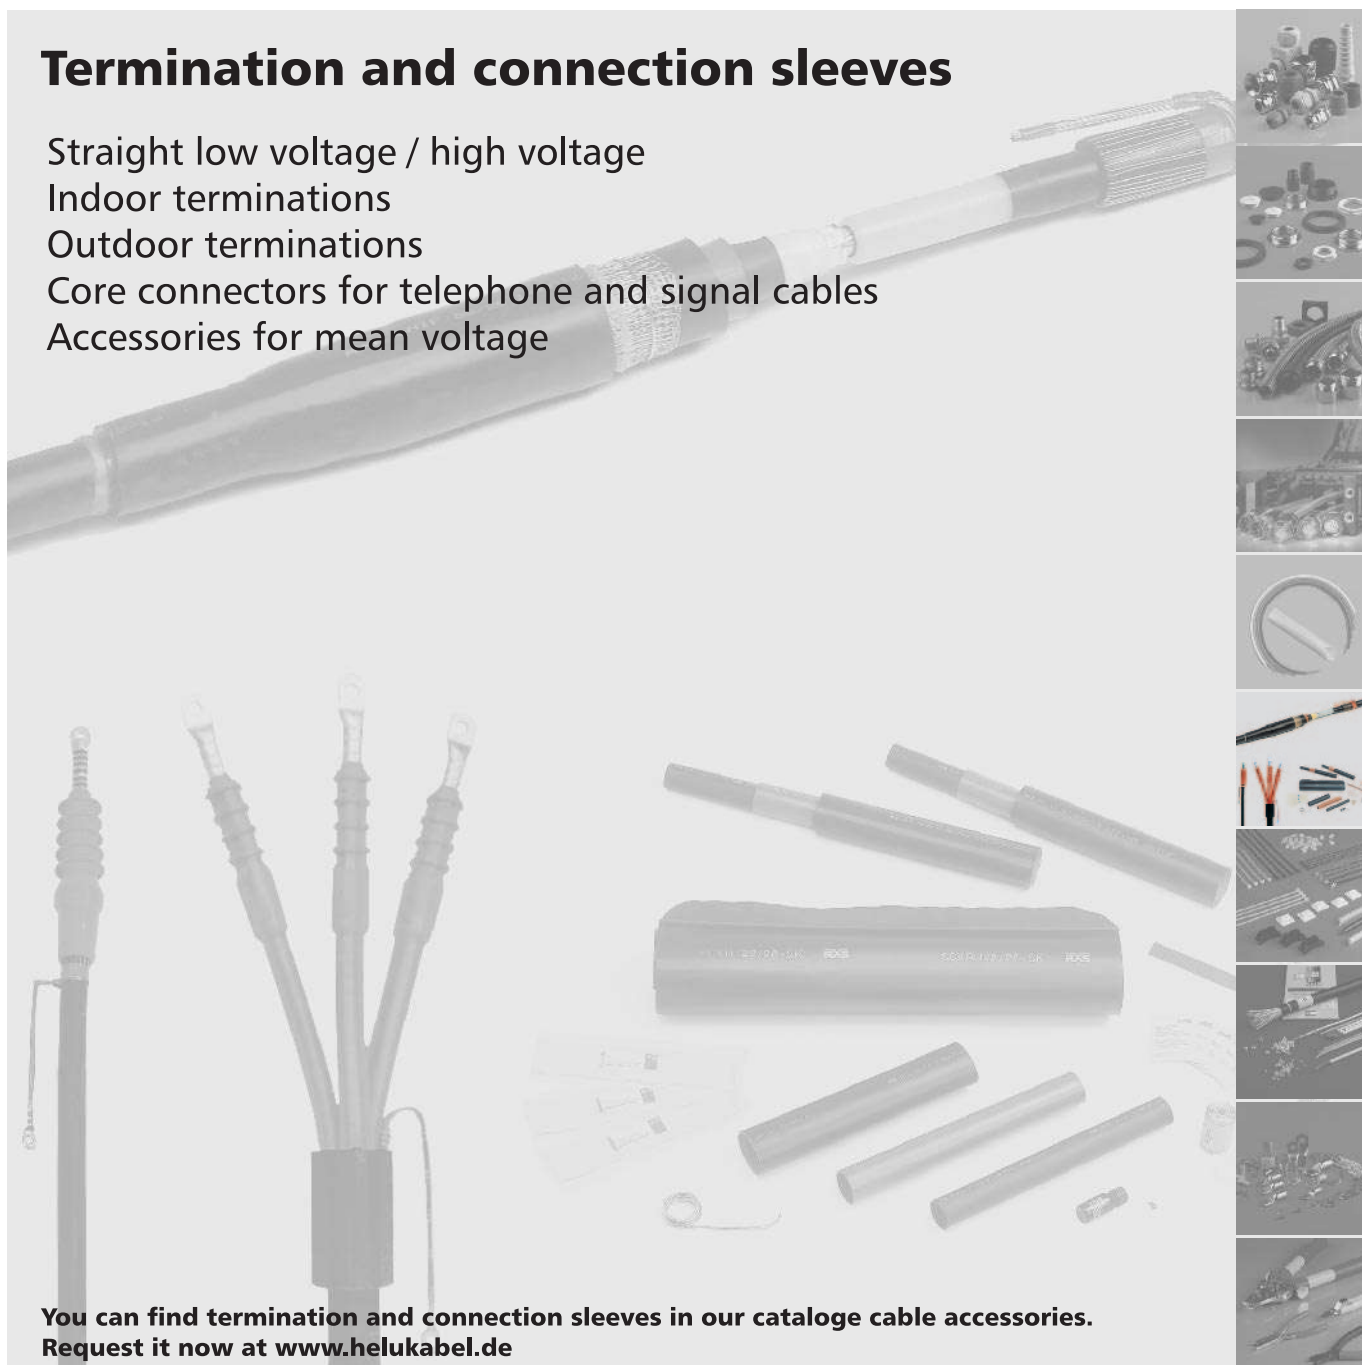

You can find termination and connection sleeves in our cataloge cable accessories.
Request it now at www.helukabel.de