


# N2XH-FE 180/E 90 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics



Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
52542	1 x 185 rm	25,5	1776,0	2090,0	350 kcmil
52899	1 x 240 rm	28,5	2304,0	2660,0	500 kcmil
52543	1 x 300 rm	31,0	2880,0	3350,0	600 kcmil
52544	1 x 400 rm	34,5	3840,0	4230,0	750 kcmil
52545	2 x 1,5 re	14,5	29,0	270,0	16
52546	2 x 2,5 re	15,5	48,0	310,0	14
52547	2 x 4 re	16,5	77,0	370,0	12
52548	2 x 6 re	17,5	115,0	440,0	10
52549	2 x 10 rm	19,5	192,0	600,0	8
52550	2 x 16 rm	21,0	307,0	780,0	6
52551	2 x 25 rm	23,5	480,0	1100,0	4
52552	2 x 35 rm	26,5	672,0	1400,0	2
52553	2 x 50 rm	30,0	960,0	1830,0	1
52554	2 x 70 rm	33,0	1344,0	2420,0	2/0
52555	2 x 95 rm	37,5	1824,0	3240,0	3/0
52556	2 x 120 rm	41,0	2304,0	3940,0	4/0
52557	3 x 1,5 re	15,0	43,0	260,0	16
52558	3 x 2,5 re	16,0	72,0	350,0	14
52559	3 x 4 re	17,0	115,0	420,0	12
52560	3 x 6 re	18,0	173,0	520,0	10
52561	3 x 10 rm	20,5	288,0	710,0	8
52562	3 x 16 rm	22,5	461,0	950,0	6
52563	3 x 25 rm	26,0	720,0	1370,0	4
52572	3 x 35 / 16 rm	29,5	1162,0	1950,0	2
52564	3 x 35 rm	28,0	1008,0	1750,0	2
52573	3 x 50 / 25 rm	33,5	1680,0	2640,0	1
52565	3 x 50 rm	32,0	1440,0	2310,0	1
52566	3 x 70 rm	35,5	2016,0	3100,0	2/0
52574	3 x 70 / 35 rm	37,0	2352,0	3520,0	2/0
52575	3 x 95 / 50 rm	42,0	3216,0	4710,0	3/0
52567	3 x 95 rm	40,5	2736,0	4180,0	3/0
52576	3 x 120 / 70 rm	46,5	4128,0	5910,0	4/0
52568	3 x 120 rm	44,0	3456,0	5130,0	4/0
52569	3 x 150 rm	48,5	4320,0	6260,0	300 kcmil
52577	3 x 150 / 70 rm	50,0	4992,0	6970,0	300 kcmil
52578	3 x 185 / 95 rm	55,5	6240,0	8750,0	350 kcmil
52570	3 x 185 rm	53,0	5328,0	7720,0	350 kcmil
52579	3 x 240 / 120 rm	61,5	8064,0	11180,0	500 kcmil
52571	3 x 240 rm	59,5	6912,0	9990,0	500 kcmil

Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
52580	4 x 1,5 re	16,5	58,0	350,0	16
52581	4 x 2,5 re	17,5	96,0	420,0	14
52582	4 x 4 re	18,5	154,0	510,0	12
52583	4 x 6 re	19,5	230,0	630,0	10
52584	4 x 10 rm	22,5	384,0	880,0	8
52585	4 x 16 rm	24,5	614,0	1180,0	6
52586	4 x 25 rm	28,5	960,0	1730,0	4
52587	4 x 35 rm	31,0	1344,0	2220,0	2
52588	4 x 50 rm	35,0	1920,0	2940,0	1
52589	4 x 70 rm	39,0	2688,0	3960,0	2/0
52590	4 x 95 rm	45,0	3648,0	5360,0	3/0
52591	4 x 120 rm	48,5	4608,0	6550,0	4/0
52592	4 x 150 rm	54,0	5760,0	8070,0	300 kcmil
52593	4 x 185 rm	59,0	7104,0	9970,0	350 kcmil
52594	4 x 240 rm	66,0	9216,0	12830,0	500 kcmil
52595	5 x 1,5 re	18,0	72,0	420,0	16
52596	5 x 2,5 re	19,0	120,0	500,0	14
52597	5 x 4 re	20,0	192,0	610,0	12
52598	5 x 6 re	21,5	288,0	760,0	10
52599	5 x 10 rm	24,5	480,0	1070,0	8
52600	5 x 16 rm	27,0	768,0	1450,0	6
52601	5 x 25 rm	31,0	1200,0	2120,0	4
52602	5 x 35 rm	34,0	1680,0	2730,0	2
52603	5 x 50 rm	38,5	2400,0	3620,0	1
52604	5 x 70 rm	43,5	3360,0	4940,0	2/0
52605	7 x 1,5 re	19,5	101,0	480,0	16
52606	7 x 2,5 re	20,5	168,0	580,0	14
52607	7 x 4 re	22,0	269,0	730,0	12
52608	10 x 1,5 re	24,0	144,0	650,0	16
52609	10 x 2,5 re	25,5	240,0	790,0	14
52610	12 x 1,5 re	24,5	173,0	720,0	16
52611	12 x 2,5 re	26,0	288,0	890,0	14
52612	24 x 1,5 re	33,0	346,0	1270,0	16

Dimensions and specifications may be changed without prior notice.

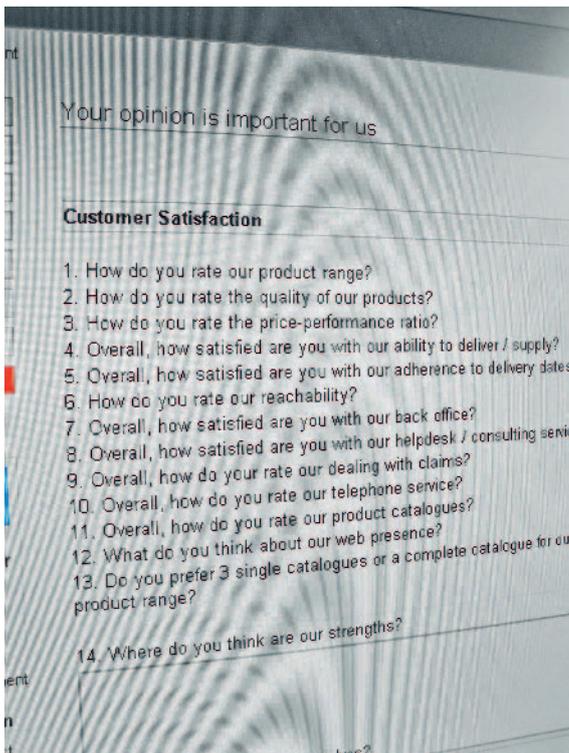

## Our Service on the Internet:

**Your opinion is important to us**

The greatest possible satisfaction of our customers is our highest goal. And so your opinion, suggestions or criticism are very important to us. We would be pleased if you could fill out the catalogue of questions and send it to us.

[www.helukabel.de](http://www.helukabel.de)