


JZ-600 HMH flexible control cable, halogen-free, extremely fire resistant, oil resistant ¹⁾, 0,6/1kV

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
12747	2 x 1	7,4	19,2	82,0	17
12748	3 G 1	8,0	29,0	99,0	17
12749	3 x 1	8,0	29,0	99,0	17
12750	4 G 1	8,8	38,4	140,0	17
12751	4 x 1	8,8	38,4	140,0	17
12752	5 G 1	9,8	48,0	160,0	17
12753	5 x 1	9,8	48,0	160,0	17
12754	7 G 1	11,7	67,0	217,0	17
12755	10 G 1	14,1	96,0	271,0	17
12756	12 G 1	14,5	115,0	301,0	17
12757	18 G 1	17,3	173,0	417,0	17
12758	25 G 1	21,1	240,0	576,0	17
12759	2 x 1,5	8,4	29,0	97,0	16
12760	3 G 1,5	9,1	43,0	119,0	16
12761	3 x 1,5	9,1	43,0	119,0	16
12762	4 G 1,5	9,9	58,0	148,0	16
12763	4 x 1,5	9,9	58,0	148,0	16
12764	5 G 1,5	11,0	72,0	172,0	16
12765	5 x 1,5	11,0	72,0	172,0	16
12766	7 G 1,5	13,3	101,0	243,0	16
12767	10 G 1,5	15,9	144,0	311,0	16
12768	12 G 1,5	16,6	173,0	392,0	16
12769	18 G 1,5	19,7	259,0	529,0	16
12770	25 G 1,5	23,9	360,0	741,0	16
12771	2 x 2,5	9,4	48,0	160,0	14
12772	3 G 2,5	9,9	72,0	177,0	14
12773	3 x 2,5	9,9	72,0	177,0	14
12774	4 G 2,5	11,1	96,0	209,0	14
12775	4 x 2,5	11,1	96,0	209,0	14
12776	5 G 2,5	12,4	120,0	272,0	14
12777	5 x 2,5	12,4	120,0	272,0	14
12778	7 G 2,5	15,0	168,0	340,0	14
12779	10 G 2,5	18,4	288,0	561,0	14
12780	12 G 2,5	22,0	432,0	799,0	14
12781	18 G 2,5	24,6	480,0	940,0	14
12782	25 G 2,5	26,9	600,0	1121,0	14

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
12783	3 G 4	12,3	115,0	255,0	12
12784	4 G 4	13,8	154,0	319,0	12
12785	5 G 4	15,3	192,0	423,0	12
12786	3 G 6	14,1	173,0	380,0	10
12787	4 G 6	15,6	230,0	441,0	10
12788	5 G 6	17,3	288,0	657,0	10
12789	3 G 10	16,5	288,0	668,0	8
12790	4 G 10	18,4	384,0	796,0	8
12791	5 G 10	20,5	480,0	972,0	8
12792	3 G 16	19,1	461,0	832,0	6
12793	4 G 16	21,2	614,0	1122,0	6
12794	5 G 16	23,6	768,0	1604,0	6
12795	3 G 25	24,0	720,0	1457,0	4
12796	4 G 25	26,9	960,0	1611,0	4
12797	5 G 25	29,3	1200,0	2070,0	4
12798	3 G 35	26,2	1008,0	1914,0	2
12799	4 G 35	29,4	1344,0	2424,0	2
12800	5 G 35	32,8	1680,0	2970,0	2
12801	4 G 50	34,2	1920,0	3467,0	1
12802	4 G 70	41,0	2688,0	4491,0	2/0
12803	4 G 95	46,2	3648,0	6170,0	3/0
12804	4 G 120	50,3	4608,0	7618,0	4/0

Dimensions and specifications may be changed without prior notice.

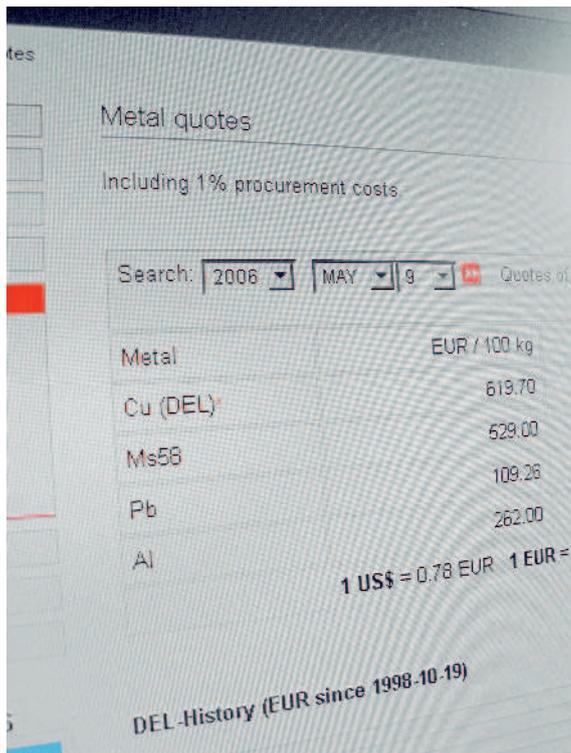

Our Service on the Internet:

Metal prices

On our Internet site, you will find the current metal prices for copper, brass, lead and aluminium as well as DEL prices developments and the dollar prices over the last few months.

www.helukabel.de