


N2XCH-FE 180/E 90 security cable, halogen-free, 0,6/1 kV, with improved fire characteristics



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
52781	3 x 95 / 50 rm	43,0	3296,0	4700,0	3/0
52782	3 x 120 / 70 rm	48,0	4236,0	5880,0	4/0
52783	3 x 150 / 70 rm	52,0	4992,0	7300,0	300 kcmil
52784	3 x 185 / 95 rm	57,5	6383,0	8760,0	350 kcmil
52785	3 x 240 / 120 rm	63,5	8242,0	11280,0	500 kcmil
52786	4 x 1,5 / 1,5 re	17,5	81,0	390,0	16
52787	4 x 2,5 / 2,5 re	19,0	128,0	470,0	14
52788	4 x 4 / 4 re	20,0	200,0	570,0	12
52789	4 x 6 / 6 re	21,5	297,0	720,0	10
52790	4 x 10 / 10 rm	24,0	504,0	1010,0	8
52791	4 x 16 / 16 rm	26,5	796,0	1370,0	6
52792	4 x 25 / 16 rm	30,5	1142,0	1940,0	4
52793	4 x 35 / 16 rm	33,0	1526,0	2420,0	2
52794	4 x 50 / 25 rm	37,5	2203,0	3240,0	1
52795	4 x 70 / 35 rm	41,5	3082,0	4360,0	2/0
52796	4 x 95 / 50 rm	47,5	4208,0	5900,0	3/0

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
52797	4 x 120 / 70 rm	52,5	5388,0	7340,0	4/0
52798	4 x 150 / 70 rm	57,5	6540,0	8840,0	300 kcmil
52799	4 x 185 / 95 rm	63,5	8159,0	11020,0	350 kcmil
52800	4 x 240 / 120 rm	70,0	10546,0	14140,0	500 kcmil
52801	7 x 1,5 / 2,5 re	20,5	133,0	520,0	16
52805	7 x 2,5 / 2,5 re	22,0	200,0	630,0	14
52802	12 x 1,5 / 2,5 re	26,0	205,0	770,0	16
52806	12 x 2,5 / 4 re	28,0	334,0	950,0	14
52803	24 x 1,5 / 6 re	35,0	413,0	1380,0	16
52807	24 x 2,5 / 10 re	37,5	696,0	1750,0	14
52804	30 x 1,5 / 6 re	37,0	499,0	1630,0	16
52808	30 x 2,5 / 10 re	39,5	840,0	2080,0	14

Dimensions and specifications may be changed without prior notice.

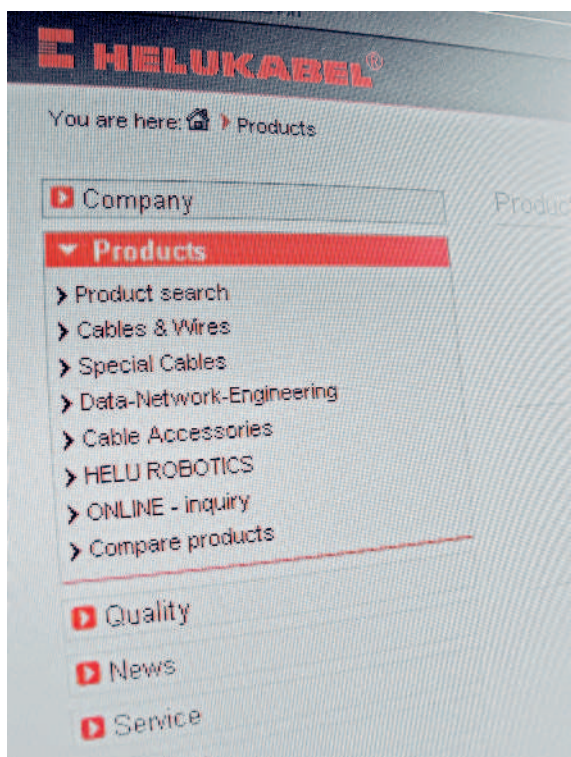

Our Service on the Internet:

Program

You will receive a very detailed and exact overview of our broad spectrum of cables, wires, accessories and data, network and bus technics as soon as HELUROBOTICS. The technical documentation is extensive and leaves no questions unanswered.

www.helukabel.de