


JZ-500 HMH-C flexible control cable, halogen-free, extremely fire resistant, oil resistant ¹⁾, Cu-screened, EMC-preferred type

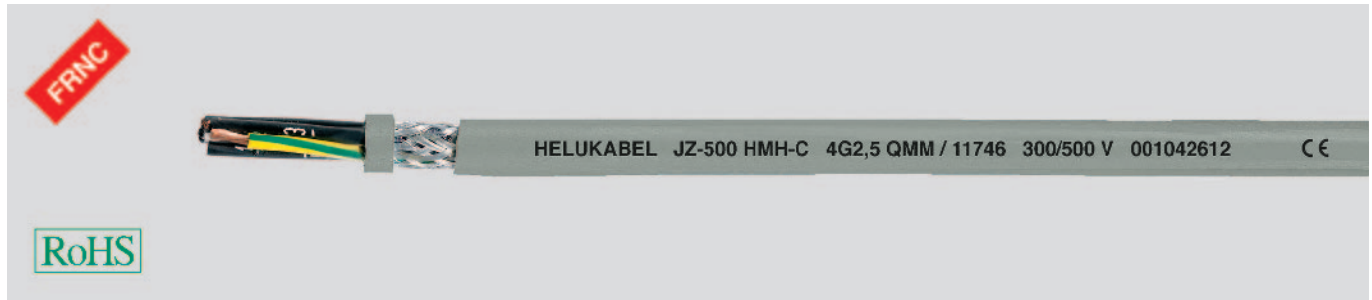

Technical data

- Halogen-free core flexible control cable adapted to E DIN VDE 0281 part 14 and DIN VDE 0281 part 13
- **Temperature range**
flexing -15°C to +70°C
fixed installation -40°C to +70°C
- **Nominal voltage** U₀/U 300/500 V
- **Test voltage** 2000 V
- **Minimum bending radius**
flexing approx. 12,5x cable Ø
fixed installation approx. 4x cable Ø
- **Coupling resistance**
max. 250 Ohm/km
- **Radiation resistance**
up to 100x10⁶ cJ/kg (up to 100 Mrad)

Cable construction

- Bare copper, fine wire conductors, to DIN VDE 0295 cl. 5, BS 6360 cl. 5 and IEC 60228 cl. 5
- Core insulation of halogen-free compound TI6, to E DIN VDE 0281 part 14
- Black cores with white continuous numbering to DIN VDE 0293
- Green-yellow earth core in the outer layer (3 cores and above)
- Cores laid up in layers with optimal lay-length
- Separating layer
- Screen braid of tinned copper wires, coverage approx. 85%
- Halogen-free sheath compound TM7, to E DIN VDE 0281 part 14
- Jacket colour grey (RAL 7001)
- **LSOH** = Low Smoke Zero Halogen-free.

Properties

- ¹⁾ For the critical applications we advise for consultation
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Tests

- Flame test to DIN VDE 0482 part 266-2/ HD 405.3, BS 4066 part 3/ EN 50266-2/ IEC 60332-3 (equivalent DIN VDE 0472 part 804 test method C)
- Self-extinguishing and flame retardant according to DIN VDE 0482 part 265-2-1/ EN 50265-2-1/ IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)
- Corrosiveness of combustion gases according to DIN VDE 0482 part 267/ EN 50267-2-2/ IEC 60754-2 (equivalent DIN VDE 0472 part 813)
- Halogen-free according to DIN VDE 0482 part 267/ EN 50267-2-1/ IEC 60754-1 (equivalent DIN VDE 0472 part 815)
- Smoke density according to DIN VDE 0482 part 1034-1+2, HD 606, DIN EN 61034-1+2/ IEC 61034-1+2, BS 7622 part 1+2 (equivalent DIN VDE 0472 part 816)

Note

- G = with green-yellow earth core;
x = without green-yellow earth core (0Z).
- Cleanroom qualification tested with analog type. Please note "cleanroom qualified" when ordering.

Application

Halogen-free, flame retardant control cables are used for instrumentation and control cables in tooling machinery, conveyor and transportation belts, production lines, in plant construction, air-conditioning systems as well as in iron and steel works. For fixed installation or for flexing applications, for casual, not constantly recurring free movement without forced motion and without tensile stress for medium mechanical loads. The cable is suitable for use in dry, damp and wet environments for installation above, on, in and beneath plaster as well as in masonry and concrete walls except for direct embedding in vibrated, compacted or tamped concrete, not suitable for imbedding in solidified or compressed concrete.

An interference-free transmission of signals and pulse is assured by the high degree of screening.

EMC = Electromagnetic compatibility

To optimise the EMC features we recommend a large round contact of the copper braiding on both ends.

CE = The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC.

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
11656	2 x 0,5	5,7	32,1	46,0	20
11657	3 G 0,5	6,0	39,2	56,0	20
11342	3 x 0,5	6,0	39,2	56,0	20
11658	4 G 0,5	6,5	46,1	62,0	20
11343	4 x 0,5	6,5	46,1	62,0	20
11659	5 G 0,5	7,0	52,1	75,0	20
11660	7 G 0,5	7,9	68,3	98,0	20
11663	12 G 0,5	9,6	117,0	158,0	20
11665	18 G 0,5	11,2	156,2	216,0	20
11667	25 G 0,5	13,4	205,5	315,0	20

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
11678	2 x 0,75	6,1	39,3	60,0	18
11679	3 G 0,75	6,4	49,4	68,0	18
11344	3 x 0,75	6,4	49,4	68,0	18
11680	4 G 0,75	6,9	57,2	78,0	18
11345	4 x 0,75	6,9	57,2	78,0	18
11681	5 G 0,75	7,4	69,0	95,0	18
11346	5 x 0,75	7,4	69,0	95,0	18
11682	7 G 0,75	8,6	87,1	130,0	18
11347	7 x 0,75	8,6	87,1	130,0	18
11685	12 G 0,75	10,4	151,2	203,0	18
11687	18 G 0,75	12,4	207,5	290,0	18

Dimensions and specifications may be changed without prior notice.

Continuation ►