


PVC spiral cables

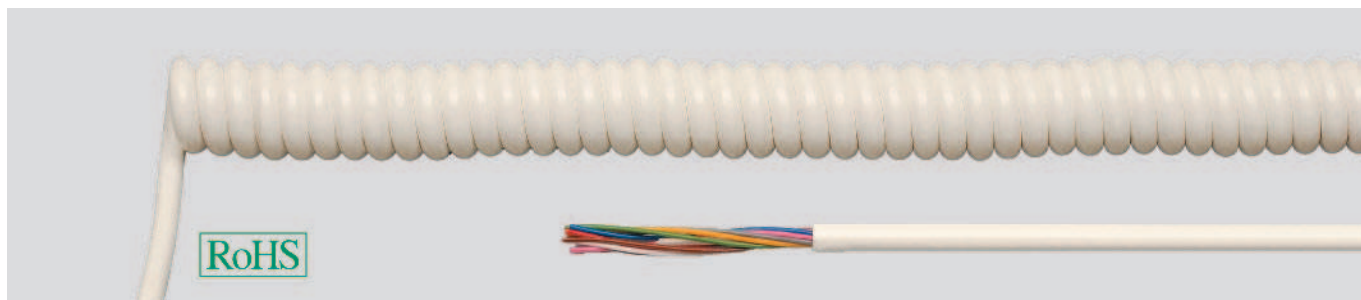

Technical data

- **Temperature range**
-5°C to +70°C
- **Nominal voltage**
H03VV-F 300/300 V (up to 1 mm²)
H05VV-F 450/700 V (from 1,5 mm²)
- **Test voltage** 2000 V
- **Expansion ratio 1:3**
straight ends 200/200

Cable construction

- Bare copper, fine wire conductors to VDE 0295 cl. 5
- PVC core insulation
- Cores stranded
- Cores colour coded to VDE 0293
- PVC outer sheath

Note

- AWG sizes are approximate equivalent values. The actual cross-section is in mm².
- On request closed spiral lengths up to max. 5000 mm possible.

Application

- Lighting industry
- Data installations
- Shops

Part No. black	white	cross-sec. mm ²	Spiral length unexpanded (WL in mm)	Cable ø ca. mm	Spiral- outer ø approx. mm	Cop. Weight kg / 1000 pcs.	AWG-No.
84500	84700	2 x 0,75	200	6,2	214	34,6	18
84502	84702	2 x 0,75	400	6,2	214	63,4	18
84504	84704	2 x 0,75	600	6,2	214	92,2	18
84506	84706	2 x 0,75	800	6,2	214	121,0	18
84508	84708	2 x 0,75	1000	6,2	214	149,8	18
84509	84709	2 x 0,75	1200	6,2	214	178,6	18
84510	84710	2 x 0,75	1400	6,2	214	207,4	18
84517	84717	3 x 0,75	200	6,6	222	51,9	18
84519	84719	3 x 0,75	400	6,6	222	95,1	18
84521	84721	3 x 0,75	600	6,6	222	138,3	18
84523	84723	3 x 0,75	800	6,6	222	181,5	18
84525	84725	3 x 0,75	1000	6,6	222	224,7	18
84526	84726	3 x 0,75	1200	6,6	222	267,8	18
84527	84727	3 x 0,75	1400	6,6	222	311,1	18
84534	84734	2 x 1,0	200	6,6	222	43,2	17
84536	84736	2 x 1,0	400	6,6	222	65,3	17
84538	84738	2 x 1,0	600	6,6	222	122,8	17
84540	84740	2 x 1,0	800	6,6	222	161,3	17
84542	84742	2 x 1,0	1000	6,6	222	199,7	17
84543	84743	2 x 1,0	1200	6,6	222	238,1	17
84544	84744	2 x 1,0	1400	6,6	222	276,5	17
84585	84785	2 x 1,5	200	7,7	264	69,6	16
84587	84787	2 x 1,5	400	7,7	264	127,0	16
84589	84789	2 x 1,5	600	7,7	264	185,6	16
84591	84791	2 x 1,5	800	7,7	264	243,6	16
84593	84793	2 x 1,5	1000	7,7	264	301,6	16
84594	84794	2 x 1,5	1200	7,7	264	359,6	16
84595	84795	2 x 1,5	1400	7,7	264	417,6	16
84602	84802	3 x 1,5	200	8,5	290	103,2	16
84604	84804	3 x 1,5	400	8,5	290	189,2	16
84606	84806	3 x 1,5	600	8,5	290	275,2	16
84608	84808	3 x 1,5	800	8,5	290	361,2	16
84610	84810	3 x 1,5	1000	8,5	290	447,2	16
84611	84811	3 x 1,5	1200	8,5	290	533,2	16
84612	84812	3 x 1,5	1400	8,5	290	619,2	16

Dimensions and specifications may be changed without prior notice.