


# Y-CY-JZ flexible, CU-screened, transparent, EMC-preferred type



Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
16248	2 x 1	7,9	46,0	97,0	17
16249	3 G 1	8,2	56,0	103,0	17
16250	4 G 1	8,9	69,0	146,0	17
16251	5 G 1	9,5	85,0	169,0	17
16252	6 G 1	10,2	112,0	199,0	17
16253	7 G 1	11,0	122,0	219,0	17
16254	8 G 1	11,6	130,0	270,0	17
16255	10 G 1	13,0	138,0	330,0	17
16256	12 G 1	13,1	186,0	350,0	17
16257	14 G 1	13,9	198,0	400,0	17
16258	16 G 1	14,5	203,0	422,0	17
16259	18 G 1	15,4	240,0	514,0	17
16260	20 G 1	16,0	286,0	545,0	17
16261	24 G 1	17,4	320,0	640,0	17
16262	25 G 1	18,3	342,0	689,0	17
16263	28 G 1	18,4	370,0	710,0	17
16264	30 G 1	18,8	395,0	762,0	17
16265	34 G 1	20,3	440,0	910,0	17
16266	40 G 1	21,8	510,0	1070,0	17
16455	41 G 1	22,1	519,0	1092,0	17
16267	50 G 1	24,0	626,0	1315,0	17
16268	61 G 1	26,2	710,0	1370,0	17
16269	80 G 1	29,3	940,0	1610,0	17
16270	100 G 1	33,0	1180,0	1840,0	17
16271	2 x 1,5	8,4	63,0	130,0	16
16272	3 G 1,5	9,0	76,0	152,0	16
16273	4 G 1,5	9,6	96,0	168,0	16
16274	5 G 1,5	10,5	111,0	202,0	16
16275	7 G 1,5	12,1	147,0	304,0	16
16276	8 G 1,5	13,0	172,0	336,0	16
16277	10 G 1,5	14,5	193,0	420,0	16
16278	12 G 1,5	14,9	254,0	434,0	16
16279	14 G 1,5	15,5	272,0	480,0	16
16280	16 G 1,5	16,4	285,0	525,0	16
16281	18 G 1,5	17,1	352,0	640,0	16
16282	20 G 1,5	18,0	367,0	690,0	16
16317	21 G 1,5	18,7	414,0	720,0	16
16283	24 G 1,5	19,8	448,0	770,0	16
16284	25 G 1,5	20,7	492,0	805,0	16
16285	28 G 1,5	21,1	525,0	900,0	16
16286	30 G 1,5	21,1	555,0	950,0	16
16287	35 G 1,5	22,7	645,0	1100,0	16
16288	40 G 1,5	24,4	730,0	1350,0	16
16456	41 G 1,5	24,8	744,0	1381,0	16
16289	50 G 1,5	26,8	977,0	1675,0	16
16290	61 G 1,5	29,6	1120,0	1800,0	16
16291	80 G 1,5	33,2	1360,0	2300,0	16
16292	100 G 1,5	36,4	1690,0	2600,0	16

Part No.	No. cores x cross-sec. mm²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
16293	2 x 2,5	10,0	96,0	180,0	14
16294	3 G 2,5	10,7	148,0	216,0	14
16295	4 G 2,5	11,4	174,0	267,0	14
16296	5 G 2,5	12,5	200,0	347,0	14
16297	7 G 2,5	15,0	235,0	407,0	14
16298	10 G 2,5	17,9	335,0	660,0	14
16318	12 G 2,5	18,0	400,0	722,0	14
16299	2 x 4	11,6	135,0	302,0	12
16300	3 G 4	12,3	178,0	340,0	12
16301	4 G 4	13,4	220,0	410,0	12
16302	5 G 4	14,8	328,0	502,0	12
16303	7 G 4	16,2	355,0	638,0	12
16304	2 x 6	13,5	175,0	350,0	10
16305	3 G 6	14,2	240,0	450,0	10
16306	4 G 6	15,6	305,0	559,0	10
16307	5 G 6	17,0	441,0	702,0	10
16308	7 G 6	18,7	505,0	907,0	10
16309	2 x 10	16,8	265,0	500,0	8
16310	3 G 10	17,8	370,0	750,0	8
16311	4 G 10	19,7	485,0	1020,0	8
16312	5 G 10	21,6	610,0	1115,0	8
16313	7 G 10	24,0	820,0	1500,0	8
16460	4 G 16	22,6	1240,0	1380,0	6
16314	5 G 16	25,2	1390,0	1553,0	6
16461	4 G 25	28,9	1310,0	1890,0	4
16462	5 G 25	31,8	1840,0	2270,0	4
16463	4 G 35	32,2	1610,0	2390,0	2
16464	5 G 35	36,4	2015,0	2885,0	2
16465	4 G 50	38,2	2220,0	3315,0	1
16157	5 G 50	43,0	2880,0	4150,0	1
16466	4 G 70	46,8	3090,0	4600,0	2/0
16158	5 G 70	51,8	4032,0	5750,0	2/0
16467	4 G 95	51,0	4060,0	6060,0	3/0
16159	5 G 95	56,0	5244,0	7580,0	3/0
16468	4 G 120	56,0	5299,0	7315,0	4/0
16160	5 G 120	63,0	6624,0	9150,0	4/0
16167	4 G 150	63,5	6774,0	9680,0	300 kcmil
16168	5 G 150	69,5	8496,0	10170,0	300 kcmil

Dimensions and specifications may be changed without prior notice.

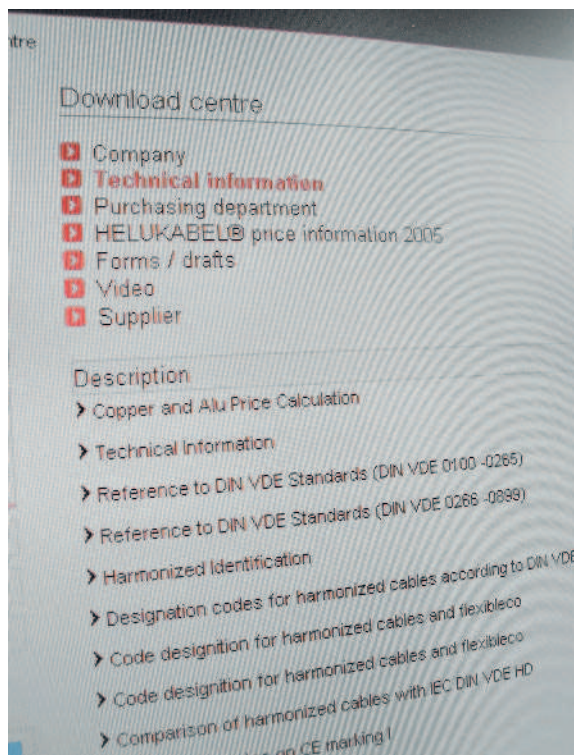

## Our Service on the Internet:

### Download-Centre

Here you will find interesting and informative documents in pdf form for download on the subjects of

- companies
- technical data
- public bidding forms
- current flyers/brochures, etc.

[www.helukabel.de](http://www.helukabel.de)