


SiHF UL/CSA halogen-free, 150°C/ 600 V, two-approvals silicon multicore cable



Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
23238	2 x 1,5	16	9,1	28,8	117,0
23239	3 G 1,5	16	9,6	43,2	131,0
23240	4 G 1,5	16	10,6	57,6	166,0
23241	5 G 1,5	16	11,4	72,0	198,0
23242	6 G 1,5	16	12,4	86,4	240,0
23243	7 G 1,5	16	12,4	100,8	261,0
23244	8 G 1,5	16	13,9	115,2	298,0
23245	10 G 1,5	16	16,1	144,0	359,0
23246	12 G 1,5	16	16,6	172,6	431,0
23247	14 G 1,5	16	18,0	201,6	520,0
23248	16 G 1,5	16	20,0	230,4	569,0
23249	18 G 1,5	16	20,9	259,2	652,0
23250	20 G 1,5	16	21,8	288,0	724,0
23251	25 G 1,5	16	24,0	345,6	925,0
23252	41 G 1,5	16	29,2	590,4	1440,0
23253	2 x 2,5	14	9,8	48,0	141,0
23254	3 G 2,5	14	10,4	72,0	174,0
23255	4 G 2,5	14	11,6	96,0	217,0
23256	5 G 2,5	14	12,4	120,0	271,0
23257	6 G 2,5	14	13,6	144,0	314,0
23258	7 G 2,5	14	13,6	168,0	331,0
23259	8 G 2,5	14	14,9	192,0	404,0
23260	10 G 2,5	14	17,2	240,0	495,0
23261	12 G 2,5	14	21,0	288,0	554,0
23262	16 G 2,5	14	22,6	384,0	725,0
23263	18 G 2,5	14	24,0	432,0	838,0
23264	25 G 2,5	14	28,8	600,0	1108,0
23265	2 x 4	12	10,9	76,8	190,0
23266	3 G 4	12	11,8	115,2	241,0
23267	4 G 4	12	12,9	153,6	304,0
23268	5 G 4	12	14,5	192,0	384,0
23269	7 G 4	12	17,8	268,8	527,0

Part No.	No. cores x cross-sec. mm²	AWG-no.	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km
23270	2 x 6	10	14,4	115,2	284,0
23271	3 G 6	10	15,1	172,8	392,0
23272	4 G 6	10	16,4	230,4	492,0
23273	5 G 6	10	18,2	288,0	610,0
23274	7 G 6	10	21,1	403,2	681,0
23275	2 x 10	8	18,0	192,0	405,0
23276	3 G 10	8	18,9	288,0	620,0
23277	4 G 10	8	20,0	384,0	741,0
23278	5 G 10	8	22,1	480,0	914,0
23279	7 G 10	8	24,9	672,0	1164,0
23280	2 x 16	6	20,9	307,2	441,0
23281	3 G 16	6	22,8	460,8	501,0
23282	4 G 16	6	24,9	614,4	623,0
23283	5 G 16	6	26,9	768,0	971,0
23284	7 G 16	6	28,1	1075,3	1690,0
23285	2 x 25	4	25,1	480,0	711,0
23286	3 G 25	4	27,0	720,0	1210,0
23287	4 G 25	4	32,1	960,0	1524,0
23288	2 x 35	2	28,7	672,0	1140,0
23289	3 G 35	2	30,6	1008,0	1523,0
23290	4 G 35	2	32,9	1344,0	2217,0

Dimensions and specifications may be changed without prior notice.

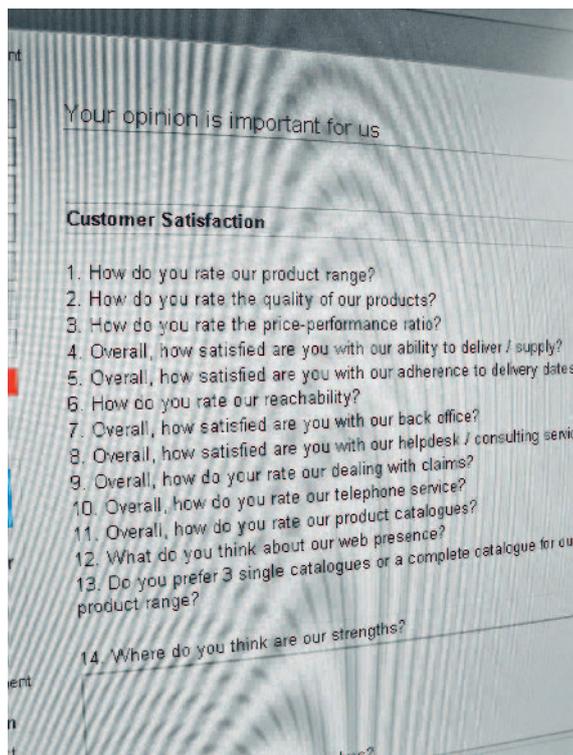

Our Service on the Internet:

Your opinion is important to us

The greatest possible satisfaction of our customers is our highest goal. And so your opinion, suggestions or criticism are very important to us. We would be pleased if you could fill out the catalogue of questions and send it to us.

www.helukabel.de